



PIXEL

OLTRE 1000 lm IN 16 mm DI DIAMETRO
INSTALLABILE IN SOLI 35 mm DI INGOMBRO

OVER 1000 lm IN 16 mm DIAMETER
INSTALLABLE IN JUST 35 mm OF SPACE

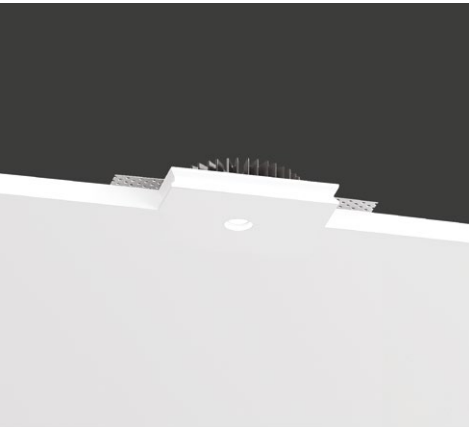

Pixel



OTHER AVAILABLE CODES

1007.AC 4 R _ E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition	<i>lens</i>	
	15	15°
	25	25° (on request)
	45	45° (on request)

1007.AC 4 R 25 E 30 WD

TECHNICAL FEATURES

Code	1007 XX
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	1.39 m²
Weight	-
Mounting	Ceiling recessed
IP rating	IP40
Insulation class	III
Control gear	Remote constant current driver (not included)
Cut out for plasterboard	160 x 160 mm
Lamp type	LED 700 mA
	Vf: 11.5 VDC
Lamp wattage	1 x 8.5W
Luminous efficacy	1 x 1000 lm - 3000K
Light distribution	Narrow beam 15° Beam 25° 45° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Light hole	Ø 16 mm
Voltage connection	By driver (optional)
CRI	90
Emergency	-
Energy efficiency class	A++
Note	-

OPTIONAL

ON/OFF driver	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094
Brick box	cod. BR1007LT

For further info and other available drivers please see page 472




PIXEL C
see page 363



PIXEL IP65
see page 423

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

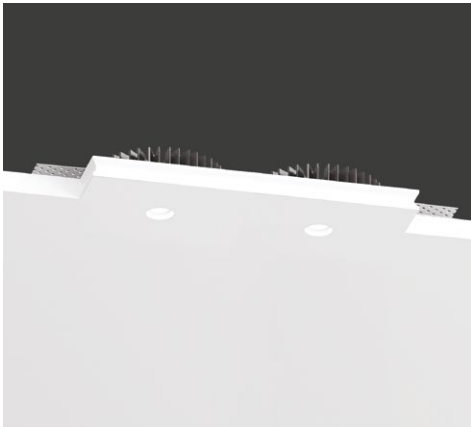

Twin Pixel



OTHER AVAILABLE CODES

1023.AC 4 R _ E _ WD		
	<i>light colour</i>	
27	2700K	
30	3000K	
40	4000K (on request)	
	<i>lens</i>	
15	15°	
25	25° (on request)	
45	45° (on request)	

example of code composition
1023.AC 4 R 25 E 30 WD


TECHNICAL FEATURES

Code	1023.AC XX
Type	Downlight 90°
	
Material	AC: AirCoral®
Absorption capacity*	2.78 m²
Weight	-
Mounting	Ceiling recessed
IP rating	IP40
Insulation class	III
Control gear	Remote constant current driver (not included)
Cut out for plasterboard	150 x 300 mm
Lamp type	LED 700 mA
	VI: 2 x 11.5 VDC
Lamp wattage	2 x 8.5W
Luminous efficacy	2 x 1000 lm - 3000K
Light distribution	Narrow beam 15° Beam 25° 45° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Light hole	Ø 16 mm
Voltage connection	By driver (optional)
CRI	90
Emergency	-
Energy efficiency class	A++
Note	-

OPTIONAL

ON/OFF driver	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094
Brick box	cod. BR1023LT

For further info and other available drivers please see page 472



DOPPIA EFFICIENZA LUMINOSA
MINIMA PROFONDITÀ DI INCASSO
DOUBLE LUMINOUS EFFICIENCY
MINIMAL RECESSED DEPTH

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

BRICK BOXES

<i>code</i>	<i>compatible product</i>	<i>dimensions (L × W × D)</i>	<i>dimensions with side brackets (L × W × D)</i>
BR1007LT	Pixel	195 × 160 × 160 mm	
BR1018LT	Pixel IP65	195 × 160 × 160 mm	
BR1073LT	Genius Concrete	200 × 140 × 70 mm	320 × 280 × 135 mm
BR1074LT	Genius Concrete emergency	200 × 140 × 70 mm	320 × 280 × 135 mm
BR1078LT	Genius Concrete IP65	200 × 140 × 70 mm	320 × 280 × 135 mm
BR1079LT	Genius Concrete IP65 emergency	200 × 140 × 70 mm	320 × 280 × 135 mm
BR1838LT	Genius Honeycomb	195 × 160 × 140 mm	
BR1839LT	Genius Honeycomb emergency	195 × 160 × 140 mm	
BR1846LT	Geniusquare IP65	195 × 160 × 140 mm	
BR1851LT	Genius	195 × 160 × 140 mm	
BR1852LT	Twin Genius	290 × 160 × 140 mm	
BR1853LT	Geniusquare	195 × 160 × 140 mm	
BR1854LT	Twin Geniusquare	290 × 160 × 140 mm	
BR1855LT	Genius emergency	195 × 160 × 140 mm	
BR1856LT	Geniusquare emergency	195 × 160 × 140 mm	
BR1857LT	Twin Genius emergency	290 × 160 × 140 mm	
BR1858LT	Twin Geniusquare emergency	290 × 160 × 140 mm	
BR1860LT	Geniusquare IP65 emergency	195 × 160 × 140 mm	
BR1861LT	Genius Brass	195 × 160 × 140 mm	
BR1862LT	Genius Brass emergency	195 × 160 × 140 mm	
BR1865LT	Genius Basic Slope	290 × 160 × 140 mm	
BR1866LT	Genius Basic Slope emergency	195 × 160 × 160 mm	
BR1869LT	Geniuscurve IP65	195 × 160 × 160 mm	
BR1870LT	Geniuscurve IP65 emergency	195 × 160 × 140 mm	
BR1871LT	Genius Black	195 × 160 × 140 mm	
BR1872LT	Genius Black emergency	195 × 160 × 140 mm	
BR1874LT	Genius Kelvin	195 × 160 × 140 mm	
BR1875LT	Genius Dim To Warm	195 × 160 × 140 mm	
BR1881LT	Genius Dynamic White	195 × 160 × 140 mm	
BR1885LT	Genius Basic	195 × 105 × 110 mm	
BR1886LT	Genius Basic emergency	195 × 105 × 110 mm	
BR1887LT	Genius Basic Flat	195 × 105 × 110 mm	
BR1888LT	Genius Basic Flat emergency	195 × 105 × 110 mm	
BR1891LT	Genius Curve	195 × 160 × 140 mm	
BR1892LT	Genius Curve emergency	195 × 160 × 140 mm	
BR1895LT	Geniusquare Brass	195 × 160 × 140 mm	
BR1896LT	Geniusquare Brass emergency	195 × 160 × 140 mm	
BR1951LT	Genius IP65	195 × 160 × 140 mm	
BR1952LT	Genius IP65 emergency	195 × 160 × 140 mm	
BR1985LT	Genius Basic IP65	195 × 105 × 110 mm	
BR1986LT	Genius Basic IP65 emergency	195 × 105 × 110 mm	
BR3111LT	Basic Sqaure	195 × 150 × 165 mm	
BR3112LT	Basic Square	195 × 150 × 165 mm	
BR3113LT	Basic Square	195 × 150 × 165 mm	
BR3115LT	Basic Square Dim To Warm	195 × 150 × 165 mm	
BR3121LT	Basic Round	195 × 150 × 165 mm	
BR3122LT	Basic Round	195 × 150 × 165 mmmm	

BRICK BOXES

<i>code</i>	<i>compatible product</i>	<i>dimensions (L × W × D)</i>	<i>dimensions with side brackets (L × W × D)</i>
BR3123LT	Basic Round	195 × 150 × 165 mm	
BR3125LT	Basic Round Dim To Warm	195 × 150 × 165 mm	
BR4421LT	Lys	195 × 160 × 160 mm	
BR4422LT	Bild	195 × 160 × 160 mm	
BR4423LT	Bild	195 × 160 × 160 mm	
BR4424LT	Bild	195 × 160 × 160 mm	
BR4425LT	Lys	195 × 160 × 160 mm	
BR4426LT	Lys	195 × 160 × 160 mm	
BR4432LT	Rim	195 × 160 × 160 mm	
BR4433LT	Rim	195 × 160 × 160 mm	
BR4434LT	Rim	195 × 160 × 160 mm	
BR5388LT	Oris IP655	445 × 270 × 225 mm	
BR5481LT	Idrout IP65	165 × 160 × 160 mm	
BR5483LT	Idrout IP65	165 × 160 × 160 mm	
BR5485LT	Idrout IP65 Dim To Warm	165 × 160 × 160 mm	
BR5489LT	Idrout IP65 emergency	165 × 160 × 160 mm	
BR5591LT	Idrround IP65	165 × 160 × 160 mm	
BR5593LT	Idrround IP65	165 × 160 × 160 mm	
BR5595LT	Idrround IP65 Dim To Warm	165 × 160 × 160 mm	
BR5599LT	Idrround IP65 emergency	165 × 160 × 160 mm	
BR6051LT	Tekno	570 × 170 × 160 mm	
BR6052LT	Tekno	570 × 170 × 160 mm	
BR6161LT	Focus	195 × 160 × 160 mm	
BR6162LT	Focus	195 × 160 × 160 mm	
BR6163LT	Focus	195 × 160 × 160 mm	
BR6169LT	Focus emergency	195 × 160 × 160 mm	
BR6213LT	Ecla emergency	195 × 160 × 160 mm	
BR6215LT	Ecla Dim To Warm	195 × 160 × 160 mm	
BR6216LT	Nefi Dim To Warm	195 × 160 × 160 mm	
BR6218LT	Nefi	195 × 160 × 160 mm	
BR6219LT	Nefi emergency	195 × 160 × 160 mm	
BR6238LT	Ring	195 × 160 × 160 mm	
BR6239LT	Ring emergency	195 × 160 × 160 mm	
BR6241LT	Jacobox	195 × 160 × 160 mm	
BR6243LT	Ring	195 × 160 × 160 mm	
BR6244LT	Jacobox	195 × 160 × 160 mm	
BR6248LT	Jacobox	195 × 160 × 160 mm	
BR6249LT	Jacobox emergency	195 × 160 × 160 mm	
BR6252LT	Spirit	445 × 310 × 160 mm	
BR6253LT	Ring	195 × 160 × 160 mm	
BR6256LT	Spirit	445 × 310 × 160 mm	
BR6259LT	Spirit	445 × 310 × 160 mm	
BR6261LT	Nefi	195 × 160 × 160 mm	
BR6262LT	Nefi	195 × 160 × 160 mm	
BR6263LT	Ecla	195 × 160 × 160 mm	
BR6265LT	Ecla	195 × 160 × 160 mm	
BR6268LT	Ecla	195 × 160 × 160 mm	

BRICK BOXES

<i>code</i>	<i>compatible product</i>	<i>dimensions (L × W × D)</i>	<i>dimensions with side brackets (L × W × D)</i>
BR6283LT	Nimbus	445 × 250 × 180 mm	
BR6312LT	Ring Dim To Warm	195 × 160 × 160 mm	
BR6313LT	Billight	230 × 150 × 160 mm	
BR6315LT	Billight Dim To Warm	230 × 150 × 160 mm	
BR6316	Jacobox Dim To Warm	195 × 160 × 160 mm	
BR6318LT	Billight	230 × 150 × 160 mm	
BR6323LT	Monolight	195 × 160 × 160 mm	
BR6325LT	Monolight Dim To Warm	195 × 160 × 160 mm	
BR6328LT	Monolight	195 × 160 × 160 mm	
BR6333LT	Ghost	550 × 160 × 85 mm	
BR6358LT	Lentil	260 × 120 × 100 mm	
BR6383LT	Elios	445 × 270 × 225 mm	
BR6487LT	Phantom IP65	340 × 120 × 80 mm	
BR6488LT	Phantom	340 × 120 × 80 mm	
BR6489LT	Phantom IP65	340 × 120 × 80 mm	
BR6498LT	Eggy	195 × 150 × 200 mm	
BR6967LT	Blade	1120 × 110 × 85 mm	
BR6968LT	Blade	490 × 110 × 85 mm	
BR6987LT	Blade IP65	490 × 110 × 85 mm	
BR6988LT	Blade IP65	1120 × 110 × 85 mm	