



GENIUSQUARE IP65

1000 lm DA UN FORO QUADRATO
CON PROTEZIONE IP65
1000 lm FROM A SQUARE HOLE
WITH IP65 PROTECTION

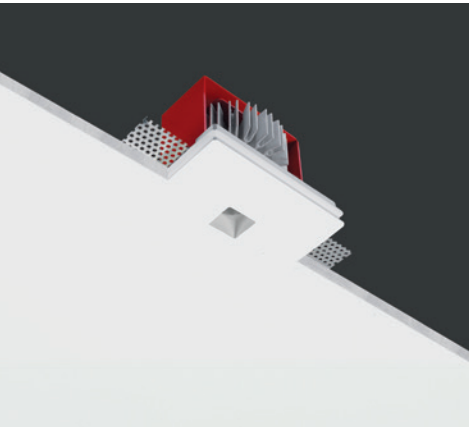

Geniusquare IP65



OTHER AVAILABLE CODES

1864.CW 4 _ E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
	<i>lens</i>	
	24	24°
	40	40°

1860.CW 4 _ E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K (on request)
	<i>lens</i>	
	24	24°
	40	40°

example of code composition
1860.CW 4 40 E 30 WD



GENIUSQUARE
see page 103

TECHNICAL FEATURES

Code	1864.CW XX	1860.CW XX emergency
Type	Downlight 90°	Downlight 90°
		
Material	CW: Coral Waterout® waterproof	CW: Coral Waterout® waterproof
Absorption capacity*	1.39 m²	1.39 m²
Weight	0.8 Kg	0.8 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Cut out for plasterboard	135 × 110 mm	135 × 110 mm
Lamp type	LED 700 mA Vf: 11.5 VDC	LED 700 mA Vf: 11.5 VDC
Lamp wattage	1 × 8.5W	1 × 8.5W
Luminous efficacy	1 × 1000 lm - 3000K	1 × 1000 lm - 3000K
Light distribution	Beam 24° 40°	Beam 24° 40°
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	20 × 20 mm	20 × 20 mm
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000129	cod. DRV0000129
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1864LT	cod. BR1864LT

For further info and other available drivers please see page 478

SUPERFUTUREDESIGN*

