



CUT


TAGLIO DI LUCE DI SOLI 5MM
A STEPLIGHT IN JUST 5MM CUT

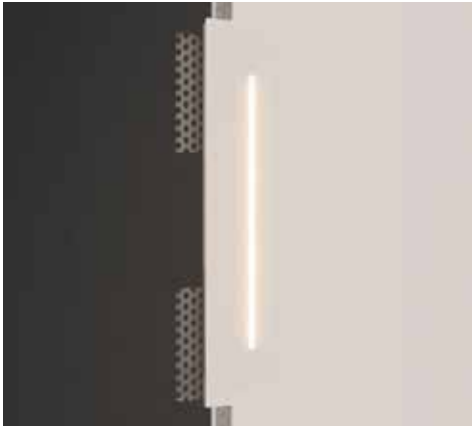

Cut

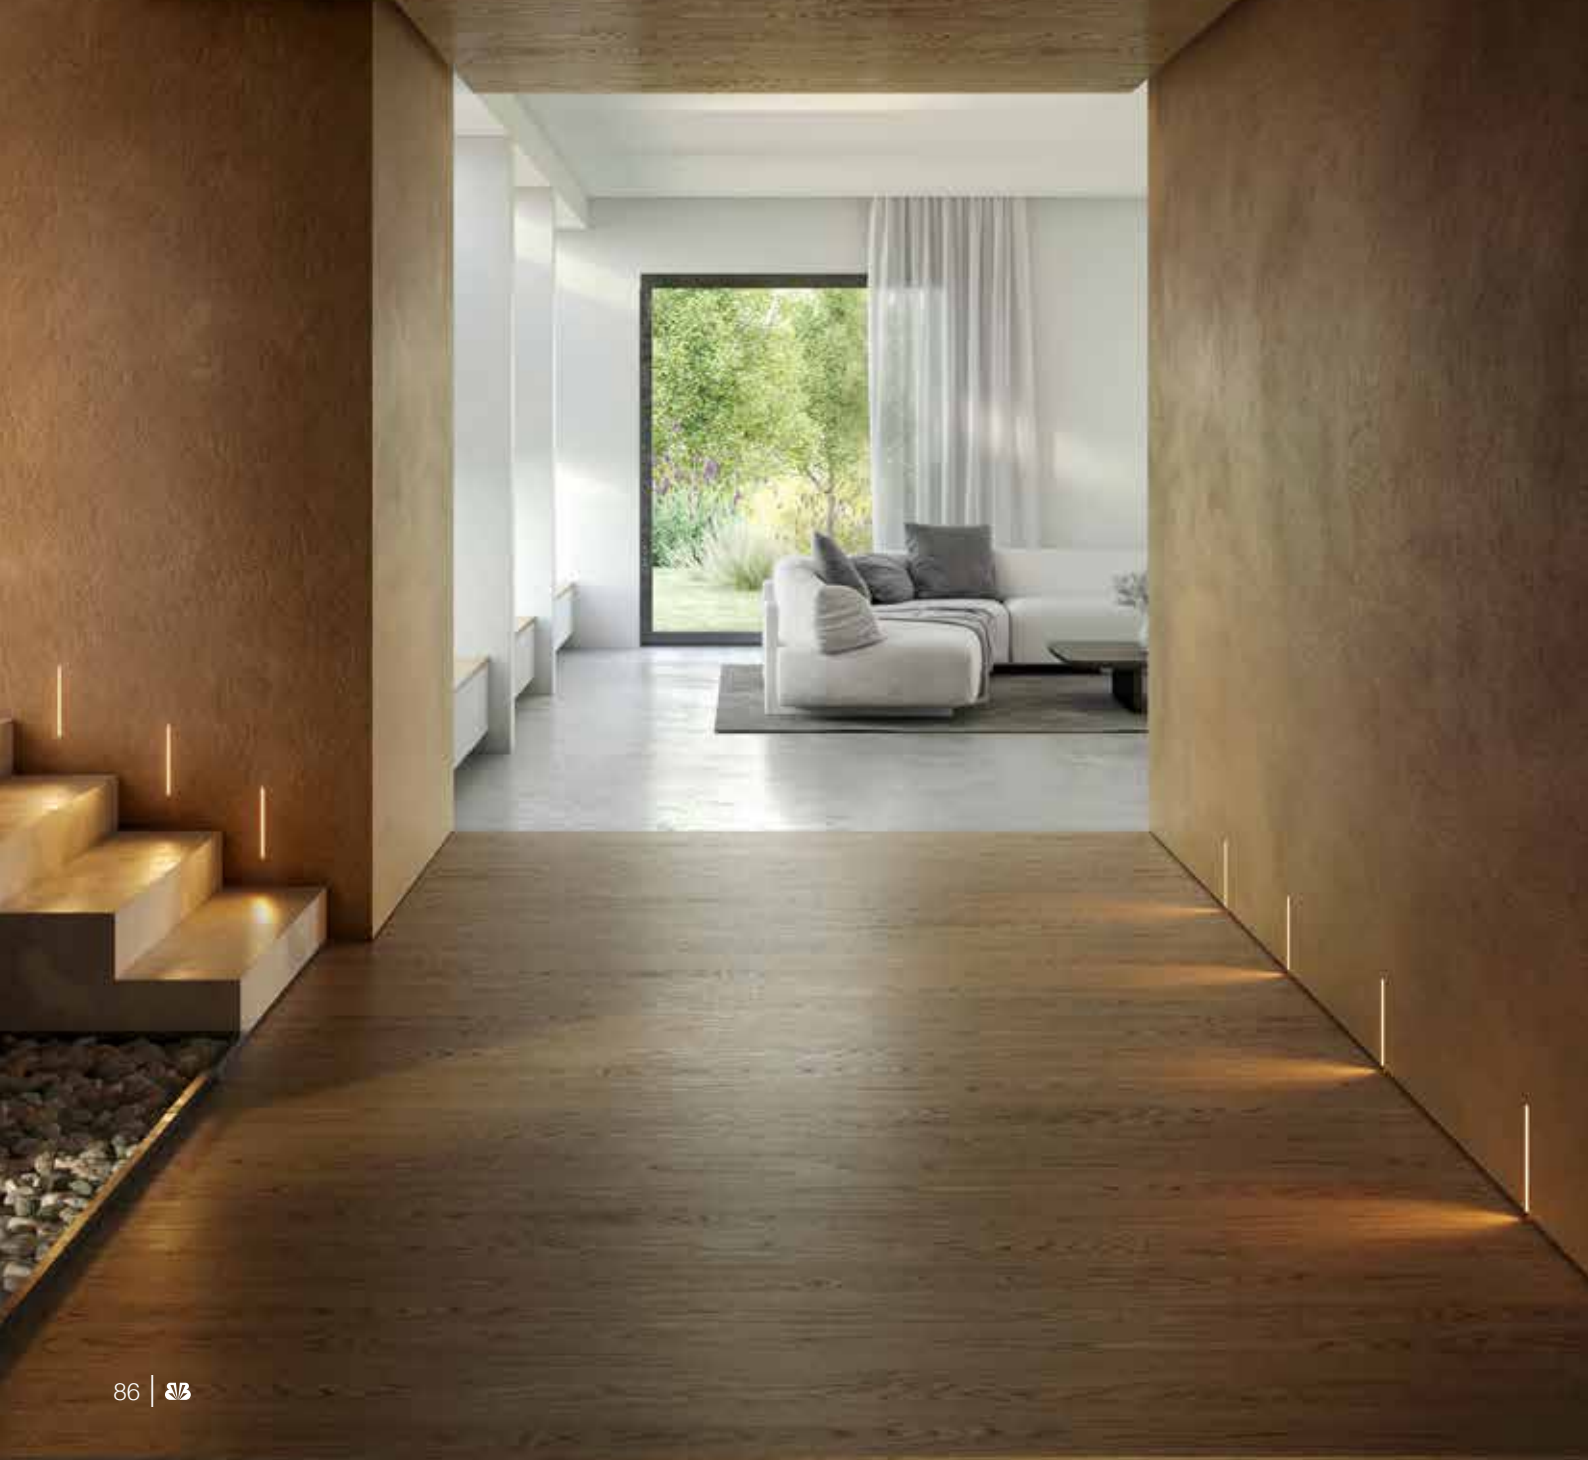

Indoor Recessed

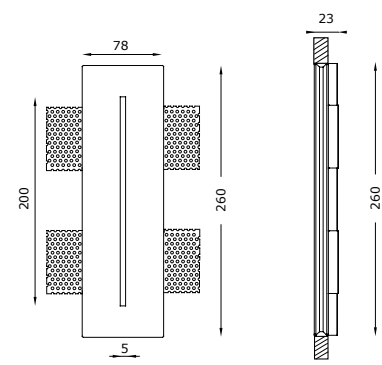

OTHER AVAILABLE CODES

1029.CW 4 R 00 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
example of code composition	1029.CW 4 R 00 E 27 WD	

TECHNICAL FEATURES

Code	1029 XX
Type	Wall recessed
	
Material	CW: Coral WaterOut® waterproof
Absorption capacity*	-
Weight	0.6kg
Mounting	Wall recessed
IP rating	IP54
Insulation class	III
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	265mm × 80mm
Lamp type	LED
	 24 VDC
Lamp wattage	1 × 1.5W
Luminous efficacy	1 × 132 lm - 3000K 1 × 126 lm - 3000K
Light distribution	Diffuse
Fitting	-
Light colour	White 2700K 3000K
Light hole	5 × 200 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	-

OPTIONAL

ON/OFF driver	cod. H8024.25
DALI dimmable LED driver	cod. DRV0000162

For further info and other available drivers please see page 470



Cut Trim



OTHER AVAILABLE CODES

1030.AC 4 R 00 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
example of code composition	1030.AC 4 R 00 E 30 WD	



TECHNICAL FEATURES

Code	1030 XX
Type	Wall recessed
	
Material	AC: AirCoral®
Weight	0,4kg
Mounting	Wall recessed
IP rating	IP40
Insulation class	III
Control gear	Remote constant current electronic driver (not included)
Lamp type	LED
	 24 VDC
Lamp wattage	1 × 1.5W
Luminous efficacy	1 × 165 lm - 3000K
Light distribution	Diffuse
Fitting	-
Light colour	White 2700K 3000K
Light hole	5 × 200 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	-

OPTIONAL

ON/OFF driver	cod. H8024.25
DALI dimmable LED driver	cod. DRV0000162

For further info and other available drivers please see page 470

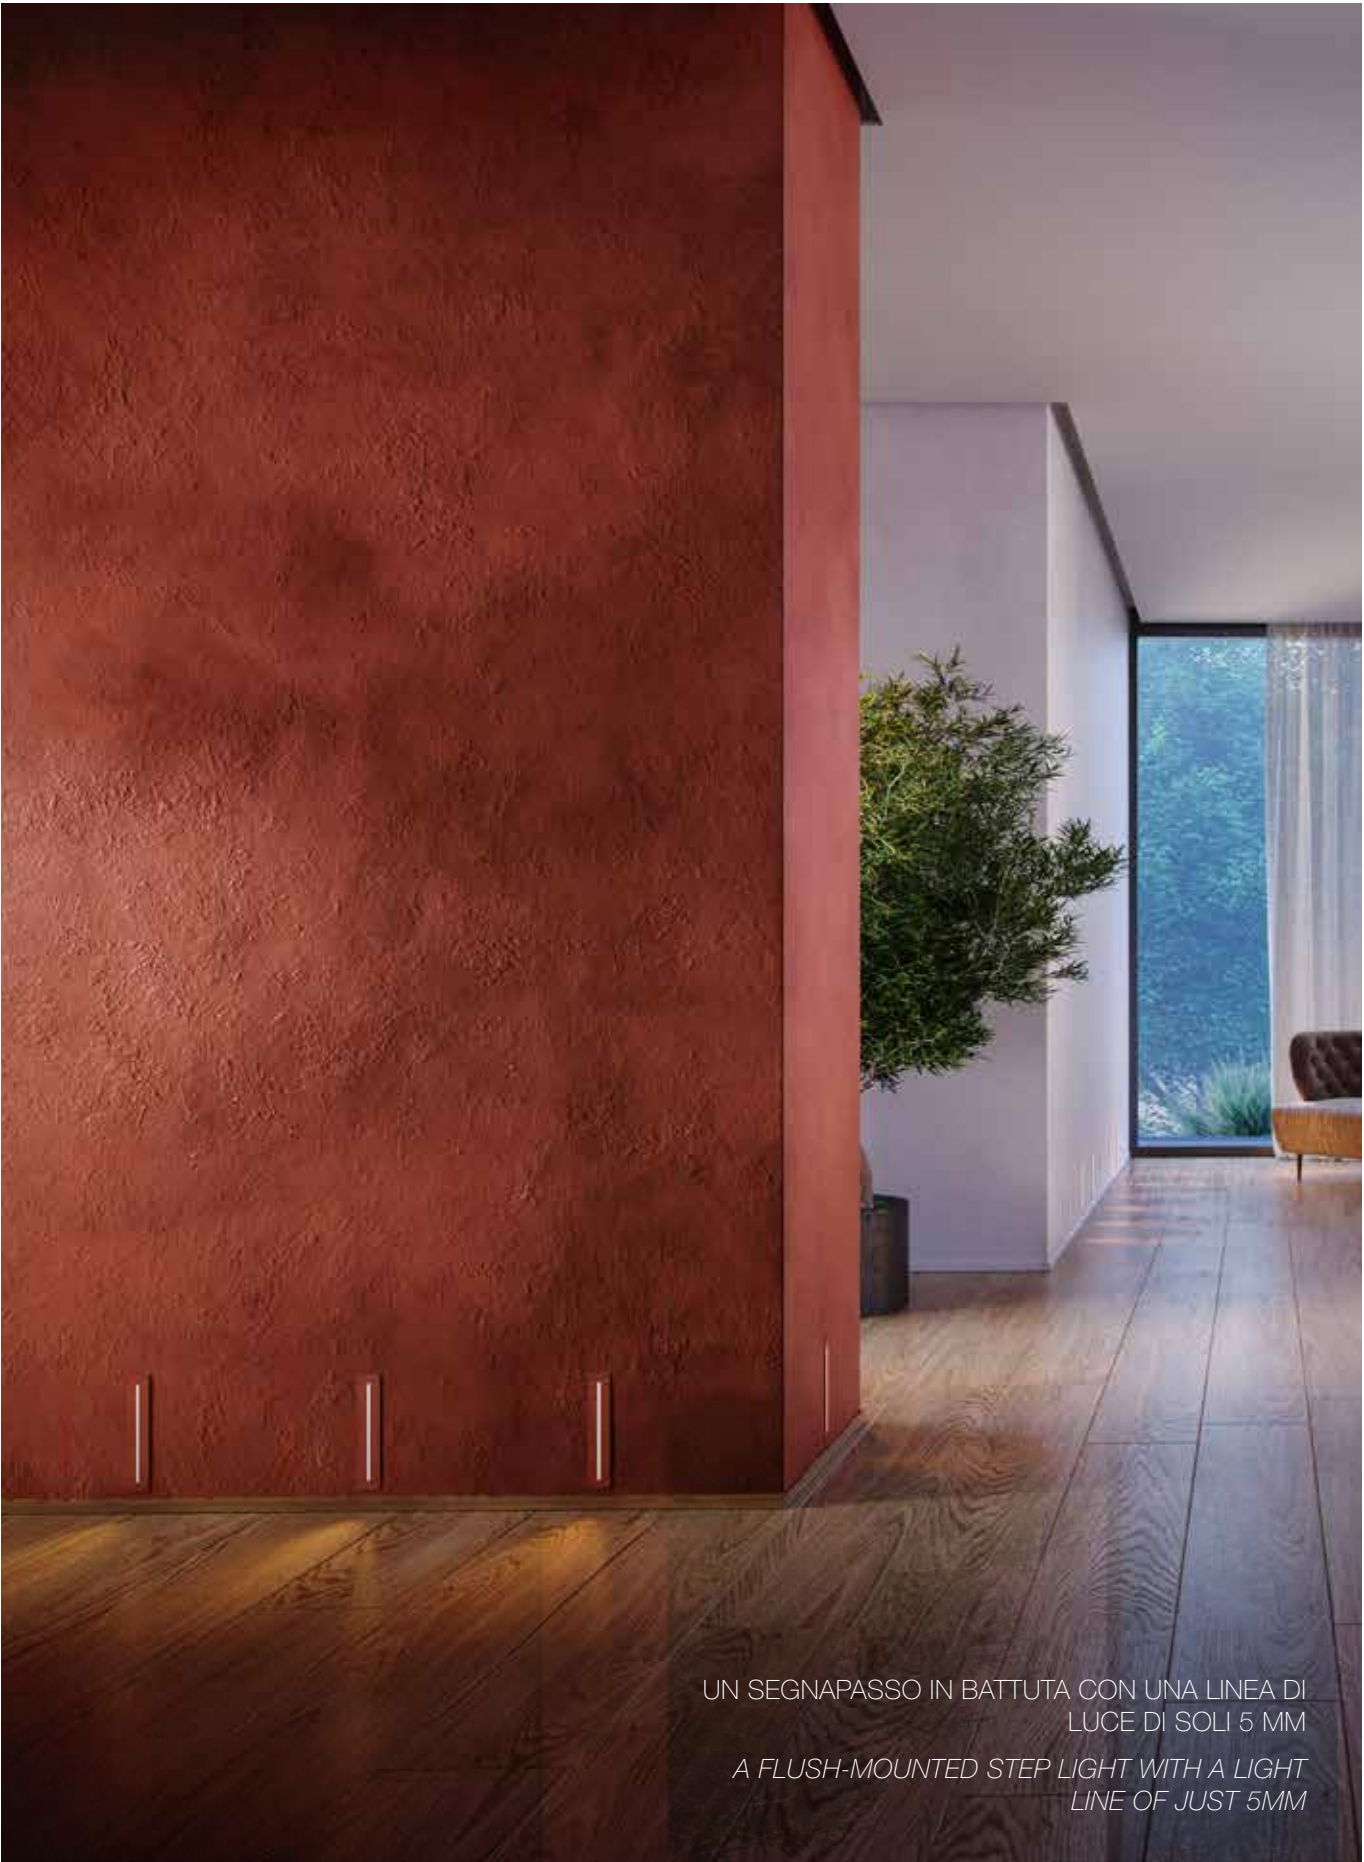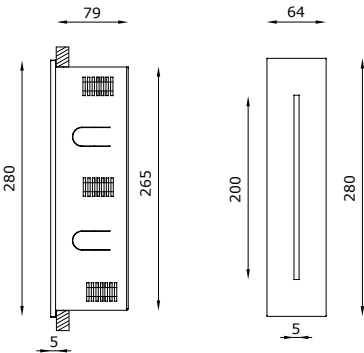

UN SEG NAPASSO IN BATTUTA CON UNA LINEA DI LUCE DI SOLI 5 MM
A FLUSH-MOUNTED STEP LIGHT WITH A LIGHT LINE OF JUST 5MM