
SLIM

LINEA DI LUCE CONTINUA A SCOMPARSA TOTALE,
POTENTE IN SOLI 16MM

A POWERFULL CONTINUOS LINE OF LIGHT,
FULLY RECESSED IN JUST 16MM.

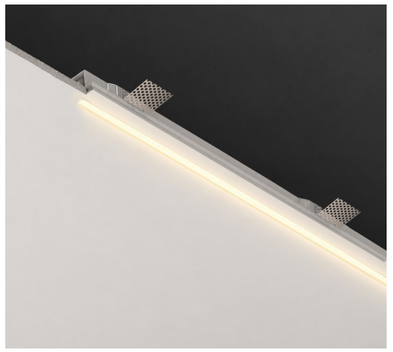

Slim

OTHER AVAILABLE CODES

8104.CW	*lens*	diffuse
	light colour	3000K
8104.27.CW	*lens*	diffuse
	light colour	2700K

TECHNICAL FEATURES | LIGHT SOURCE


Code	**8104.CW**
Type	Downlight 90° I Wall recessed 90°
Material	-
Weight	-
Mounting	-
IP rating	IP67
Lenght	5000mm
Insulation class	III
Control gear	Remote constant voltage electronic driver (not included)
Cut out for plasterboard	-
Lamp type	LED 24 VDC
Lamp wattage	16.5 W/m
Luminous efficacy	1350 lm/m - 2700K 1465 lm/m - 3000K 1473 lm/m - 4000K
Light distribution	Diffuse
Fitting	-
Light colour	White 2700K I 3000K I 4000K on request
Light hole	-
Voltage connection	By driver (optional)
CRI	>90
Max. Ambient. Tempt. (Ta max)	45°C / 113°F
Unit Cut	62.5 mm
Cable lenght	300mm
Emergency	-
Energy efficiency class	A++
Note	-

OPTIONAL

ON/OFF driver 150 W	cod. DRV0000214
ON/OFF driver 150 W IP67	cod. DRV0000215
DALI driver 240 W	cod. DRV0000216

For further info and other available drivers please see page <?>


* The absorption capacity per m^2 calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m^2

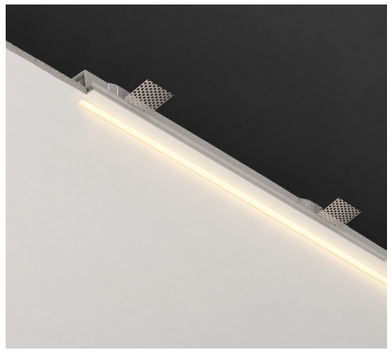

Slim


TECHNICAL FEATURES | MODULAR BODY | LINE

Code	**2014.CW**
Type	Downlight 90° I Wall recessed 90°
Material	AC: Coral WaterOut®
Weight	4.7 Kg
Mounting	Ceiling and wall recessed
IP rating	IP65
Cut out for plasterboard	1000 mm for each module installed x 72mm
Light hole	1000 mm x 16mm for each module installed
Note	-




TECHNICAL FEATURES | CURVE 600MM

Code	**2016.CW**
Type	Downlight 90° I Wall recessed 90°
Material	AC: Coral WaterOut®
Weight	4.9 Kg
Mounting	Ceiling and wall recessed
IP rating	-
Cut out for plasterboard	r 600 mm for each module installed x 72mm
Light hole	r 600 mm x 16mm
Note	-

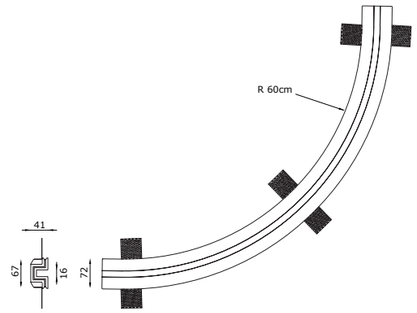


TECHNICAL FEATURES | CURVE 300MM

Code	**2015.CW**
Type	Downlight 90° I Wall recessed 90°
Material	AC: Coral WaterOut®
Weight	2.9 Kg
Mounting	Ceiling and wall recessed
IP rating	-
Cut out for plasterboard	r 300 mm for each module installed x 72mm
Light hole	r 300 mm x 16mm
Note	-

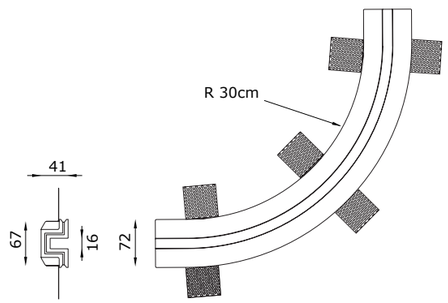

TECHNICAL FEATURES | CLOSURE HEADPARTS

Code	**2017.CW**
Type	Downlight 90° I Wall recessed 90°
Material	AC: Coral WaterOut®
Weight	0.5 Kg
Mounting	-
IP rating	-
Cut out for plasterboard	60 x 72mm
Light hole	-
Note	-



* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²