
ORBIT NAKED




INCASSO A SCOMPARSA TOTALE ORIENTABILE,
INSTALLABILE SU QUALSIASI SUPERFICIE

FULLY RECESSED ADJUSTABLE SPOTLIGHT,
SUITABLE FOR INSTALLATION ON ANY SURFACE.

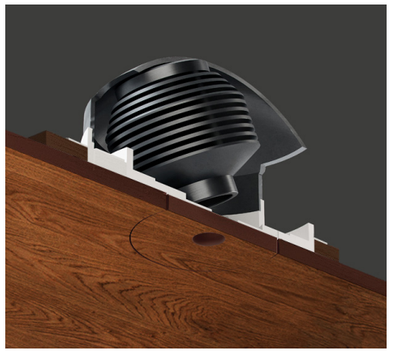

Orbit Naked

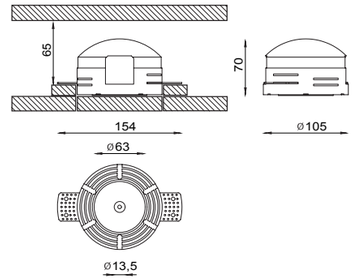

OTHER AVAILABLE CODES

1063.BL 4 R 24 E _ WD

light colour

27	2700K
30	3000K
40	4000K (on request)

emergency

1064.BL 4 R 24 E _ WD

light colour

27	2700K
30	3000K
40	4000K (on request)

example of code composition: 1063.BL 4 R 24 E **30** WD

TECHNICAL FEATURES

	1063.BL	**1064.BL** emergency
Code		
Type	**±30°** Tiltable downlight	**±30°** Tiltable downlight
Material	Alluminium	Alluminium
Absorption capacity*	2.72 m²	2.72 m²
Weight	1 Kg	1 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Cut out	Ø 13 mm	Ø 13 mm
Lamp type	LED 200 mA Vf: 36 VDC	LED 200 mA Vf: 36 VDC
Lamp wattage	1 × 8W	1 × 8W
Luminous efficacy	1 × 1125 lm - 3000K	1 × 1125 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 13 mm	Ø 13 mm
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	-	-

OPTIONAL

ON/OFF driver	cod. DRV0000173	cod. DRV0000173
PUSH/ 0/1-10V/ DALI dimmable LED driver	cod. DRV0000177	cod. DRV0000177

For further info and other available drivers please see page 472

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m².