

Design
Marco Acerbis

BELL




LAMPADA DA INCASSO CON SCURETTO INTEGRATO.

Apparecchio da interni a scomparsa totale in AirCoral® per installazione a soffitto di cartongesso o laterizio. Bell è caratterizzato da una superficie interna stondata e un vuoto perimetrale che crea una contrapposizione tra luce e ombra, presenza e assenza di materia. La sorgente arretrata crea una luce definita ma che allo stesso tempo si distribuisce morbida sia sulla superficie del corpo che nello spazio. Bell, una nuova tipologia di lampada, la cui presenza si rileva sia spenta che accesa e che conferisce una raffinata personalità agli ambienti.

RECESSED LIGHT WITH INTEGRATED SHADE.

An indoor and total disappearing luminaire of AirCoral®, Bell is installable on plasterboard or brick ceilings. It is characterised by an internal, rounded perimetral empty space creating a contrast between light and shadow, of presence and absence of matter. The backward light source casts a sharp beam which, at the same time, scatters softly both on the body surface and in the environment. Bell is a new typology of lamp whose personality is always visible, with the light switched on or off as well. This personality reflects itself in the surrounding environment too.

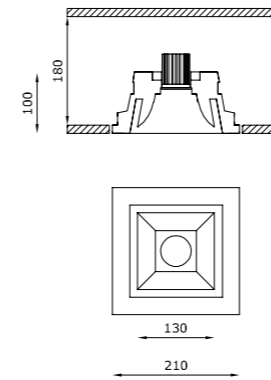

TECHNICAL FEATURES

Code	1901.AC	1902.AC
Type	Downlight 90° 	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	5.69 m²	5.69 m²
Weight	2.9 Kg	3 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Remote constant current electronic driver and inverter
Cut out for plasterboard	220 x 220 mm	220 x 220 mm
Lamp type	LED 500 mA ⚡ V _f : 18 VDC	LED 500 mA ⚡ V _f
Lamp wattage	1 x 9W	1 x 9W
Luminous efficacy	1125 lm - 3000K	1125 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	130 x 130 mm	130 x 130 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1901.AC	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°2 code 1901.AC - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 1901.AC - 500 mA

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²



SUPERFUTUREDESIGN