




HI-AUDIO BOX 1

code 6091.AC

Recessed flangeless luminaire. Ceiling mounting.
Installation into plasterboard. AirCoral® Body
Case in steel independent from the frontal body.
Lamp unit independent and adjustable +/- 40° as well on vertical as on horizontal axis. Backward position of the light sources in order to have a minimal visual impact.
Stable and of high precision the pointing out of the luminous flux.

Hi-Audio Box "Sound redefines the perception of space". One way Hi-Fi broadband speaker (100 Hz – 22KHz). Hi-Audio Box produces an excellent high definition acoustic for every location. Developed for professional public address systems and even for Hi-Fi home application with highest sounds pretence.

Hi-Audio Box achieves a homogeneous sound radiation on 360° and fulfills the area with a pleasant backdrop from best sound. For all public or home spaces applicable, indicated application = 1 speaker for 40–50m². Hi-Audio Box reduces, due unidirectional sound irradiation, the standard installed speaker; opposed to a traditional system. The Hi-Audio Box enable an existing light system to be also a sound system contemporary. Speakers grow therefore to an integrated part in the architectural context with stylistic idiom, functionality and unusual acoustic efficiency.

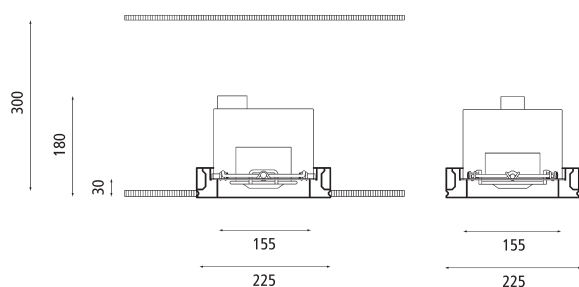

TECHNICAL FEATURES

Type	Tilttable downlight +/- 40°
Material	AC: AirCoral®
Absorption capacity*	4.55 m²
Weight	3.4 Kg
Mounting	Ceiling recessed
IP rating	IP20
Control gear	-
Cut out for plasterboard	235 x 235 mm
Lamp type	-
Lamp wattage	-
Luminous efficacy	-
Light distribution	-
Fitting	-
Light Colour	-
Light Hole	-
Voltage connection	-
CRI	-
Emergency	-
Energy efficiency class	-
Speaker	1 x 50W/90W - 8 Ω
Frequency	95 - 21.000 Hz (+/- 3 dB)

*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m²

FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.




HI-AUDIO BOX 2

code 6092.AC

Recessed flangeless luminaire. Ceiling mounting.
Installation into plasterboard. AirCoral® Body
Case in steel independent from the frontal body.
Lamp unit independent and adjustable +/- 40° as well on vertical as on horizontal axis. Backward position of the light sources in order to have a minimal visual impact.
Stable and of high precision the pointing out of the luminous flux.

Hi-Audio Box "Sound redefines the perception of space". One way Hi-Fi broadband speaker (100 Hz – 22KHz). Hi-Audio Box produces an excellent high definition acoustic for every location. Developed for professional public address systems and even for Hi-Fi home application with highest sounds pretence.

Hi-Audio Box achieves a homogeneous sound radiation on 360° and fulfills the area with a pleasant backdrop from best sound. For all public or home spaces applicable, indicated application = 1 speaker for 40–50m². Hi-Audio Box reduces, due unidirectional sound irradiation, the standard installed speaker; opposed to a traditional system. The Hi-Audio Box enable an existing light system to be also a sound system contemporary. Speakers grow therefore to an integrated part in the architectural context with stylistic idiom, functionality and unusual acoustic efficiency.

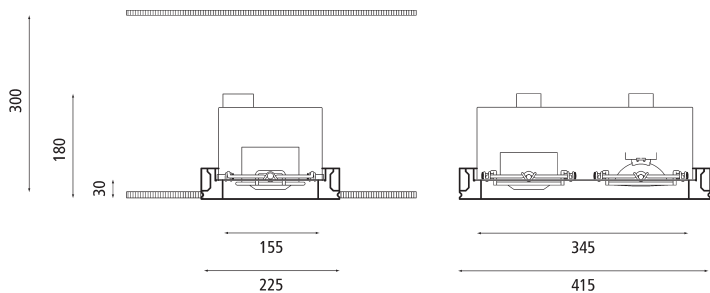

TECHNICAL FEATURES

Type	Tilttable downlight +/- 40°
Material	AC: AirCoral®
Absorption capacity*	6.75 m²
Weight	4.4 Kg
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Electronic transformer
Cut out for plasterboard	235 x 425 mm
Lamp type	QR 111
Lamp wattage	1 x 100W max
Luminous efficacy	-
Light distribution	-
Fitting	G53
Light Colour	-
Light Hole	155 x 345 mm
Voltage connection	220-240V / 12V · 50-60Hz
CRI	-
Emergency	-
Energy efficiency class	A
Speaker	1 x 50W/90W - 8 Ω
Frequency	95 - 21.000 Hz (+/- 3 dB)

OPTIONAL

H8105	Dimmable electronic transformer
00010KIT	kit LED dimmable I bulb 10W - 12V

*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m²

FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.




HI-AUDIO BOX 3

code 6093.AC

Recessed flangeless luminaire. Ceiling mounting. Installation into plasterboard. AirCoral® Body Case in steel independent from the frontal body. Lamp unit independent and adjustable +/- 40° as well on vertical as on horizontal axis. Backward position of the light sources in order to have a minimal visual impact. Stable and of high precision the pointing out of the luminous flux.

Hi-Audio Box "Sound redefines the perception of space". One way Hi-Fi broadband speaker (100 Hz – 22KHz). Hi-Audio Box produces an excellent high definition acoustic for every location. Developed for professional public address systems and even for Hi-Fi home application with highest sounds pretence.

Hi-Audio Box achieves a homogeneous sound radiation on 360° and fulfills the area with a pleasant backdrop from best sound. For all public or home spaces applicable, indicated application = 1 speaker for 40–50m². Hi-Audio Box reduces, due unidirectional sound irradiation, the standard installed speaker; opposed to a traditional system. The Hi-Audio Box enable an existing light system to be also a sound system contemporary. Speakers grow therefore to an integrated part in the architectural context with stylistic idiom, functionality and unusual acoustic efficiency.

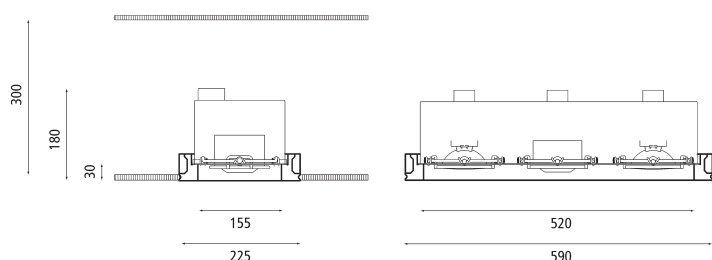

TECHNICAL FEATURES

Type	Tiltable downlight +/- 40°
Material	AC: AirCoral®
Absorption capacity*	8.95 m²
Weight	4.8 Kg
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Electronic transformer
Cut out for plasterboard	235 x 600 mm
Lamp type	QR 111
Lamp wattage	2 x 100W max
Luminous efficacy	-
Light distribution	-
Fitting	G53
Light Colour	-
Light Hole	155 x 520 mm
Voltage connection	220-240V / 12V · 50-60Hz
CRI	-
Emergency	-
Energy efficiency class	A
Speaker	1 x 50W/90W - 8 Ω
Frequency	95 - 21.000 Hz (+/- 3 dB)

OPTIONAL

H8200	Dimmable electronic transformer
00010KIT	kit LED dimmable I bulb 10W - 12V



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

*The absorption capacity per m3 calculated by the American organization TCNA is parametrized for an average room of 2,7m in height and therefore expressed in m²

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.