

IDROUT IP65





INCASSO CON SORGENTE LUMINOSA A VISTA.

Idrout IP65 è un apparecchio da esterni, incasso a scomparsa totale in Coral WaterOut® che, grazie al design lineare, pulito e minimale, sa integrarsi alla perfezione nelle superfici, raggiungendo uno straordinario risultato di scomparsa totale. Idrout IP65 è adatto per l'installazione in ambienti umidi, come bagni o SPA, garantendo l'impermeabilità e una lunga durata nel tempo. Una luce essenziale che dialoga con un prodotto altamente tecnico. La sorgente retrocessa dona una luce precisa e puntuale, senza compromettere funzionalità e design.

RECESSED FITTING WITH EXPOSED LIGHT SOURCE.

Idrout IP65 is a totally disappearing outdoor recessed luminaire made of Coral WaterOut®; thanks to its linear, neat and minimal design, it is able to perfectly integrate inside surfaces, achieving an extraordinary result of total disappearance. Idrout IP65 is ideal to be installed in moist environments, such as bathrooms or SPAs, guaranteeing impermeability and long duration over time. An essential light interacting with a highly technical product. The backward light source emanates a precise and punctual beam which does not compromise functionality and design.

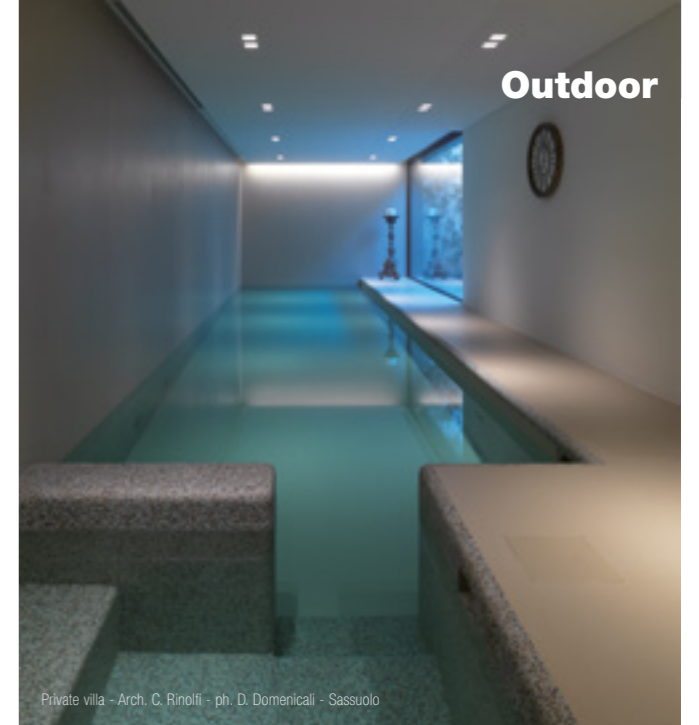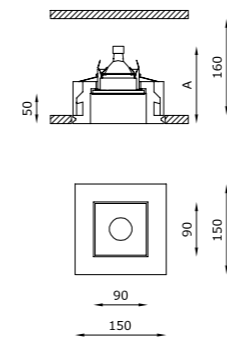

Outdoor

Private villa - Arch. C. Rinaldi - ph. D. Domenicali - Sassuolo

TECHNICAL FEATURES

Code	5483.Z.CW	5489.Z.CW	5481.CW
Type	Downlight 90° ▲	Downlight 90° ▲	Downlight 90° ▲
Material	CW: Coral WaterOut® waterproof	CW: Coral WaterOut® waterproof	CW: Coral WaterOut® waterproof
Weight	1.1 Kg	1.1 Kg	1.1 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65	IP65
Insulation class	III	III	III
Control gear	Constant current electronic driver (not included)	Constant current electronic driver	Electronic transformer (not included)
Dimensions	A: 150 mm	A: 150 mm	A: 130 mm
Cut out for plasterboard	160 x 160 mm	160 x 160 mm	160 x 160 mm
Lamp type	LED 500 mA ⚡ Vi: 18 VDC	LED 500 mA ⚡	QR CB 51 🔊
Lamp wattage	1 x 9W	1 x 9W	1 x 50W max
Luminous efficacy	1125 lm - 3000K	1125 lm - 3000K	-
Light distribution	Wide beam 40°	Wide beam 40°	-
Fitting	-	-	GU5.3
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)	-
Light hole	90 x 90 mm	90 x 90 mm	90 x 90 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz	By driver (optional)
CRI	>90	>90	-
Emergency	-	1 hour	-
Energy efficiency class	A++	A++	A
Note	On request available dimmable PUSH or DALI.	-	-

OPTIONAL ACCESSORIES

product code	optional code	description	info
5483.Z.CW	H8500.E	Constant current electronic driver	Suitable for n°2 code 5483.Z.CW - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 5483.Z.CW - 500 mA
	BR5483LT	Brick box	Dimensions L: 195 mm; W: 160 mm; D: 160 mm (instructions on page 502)
5481.CW	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
	BR5481LT	Brick box	Dimensions L: 195 mm; W: 160 mm; D: 160 mm (instructions on page 502)



Private villa - A. Ogarró J. Zapata Arquitectos SC - Mexico