

LIGHT




SINGOLA E DOPPIA LUCE CON LED A VISTA.


Light è sostanza che si fonde con la materia per dare vita a una tecnologia che garantisce sempre il miglior risultato possibile, è pura luce. Apparecchio da interni a scomparsa totale in AirCoral® per installazione in soffitto di cartongesso o laterizio, Light si fonde con lo spazio in cui viene inserito. Disponibile in versione singola (Monolight) o doppia (Bilight), la sorgente luminosa retrocessa con meccanica a vista genera una luce precisa e tecnica, in grado di cambiare l'equilibrio di un ambiente.

SINGLE AND DOUBLE LIGHT WITH EXPOSED LED.

Light is substance blending in with matter to give life to a technology that guarantees the best result ever, is pure light. A totally disappearing indoor recessed luminaire made of AirCoral®, installable on plasterboard or brick ceilings, Light blends into the space it is inserted in. Available in single (Monolight) or double version (Bilight), its recessed light source with in-view mechanics creates a precise, technical light, able to change the balance of an environment.



A. MONOLIGHT

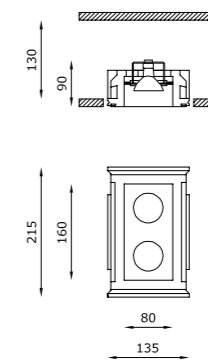

B. BILIGHT

TECHNICAL FEATURES

Code	6323.AC (fig. A)	6328.Z.AC (fig. A)	6313.AC (fig. B)	6318.Z.AC (fig. B)
Type	Downlight 90°	Downlight 90°	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	2.82 m²	2.82 m²	4.68 m²	4.68 m²
Weight	0.9 Kg	0.9 Kg	1.3 Kg	1.3 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20	IP20	IP20
Insulation class	III	III	III	III
Control gear	Electronic transformer (not included)	Constant current electronic driver (not included)	Electronic transformer (not included)	Constant current electronic driver (not included)
Cut out for plasterboard	145 x 145 mm	145 x 145 mm	225 x 145 mm	225 x 145 mm
Lamp type	QR CB 51	LED 500 mA Vf: 18 VDC	QR CB 51	LED 500 mA Vf: 2 x 18 VDC
Lamp wattage	1 x 50W max	1 x 9W	2 x 50W max	2 x 9W
Luminous efficacy	-	1125 lm - 3000K	-	2 x 1125 lm - 3000K
Light distribution	-	Wide beam 40°	-	Wide beam 40°
Fitting	GU5.3	-	GU5.3	-
Light colour	-	White 3000K White 2700K 4000K (on request)	-	White 3000K White 2700K 4000K (on request)
Light hole	80 x 80 mm	80 x 80 mm	160 x 80 mm	160 x 80 mm
Voltage connection	By driver (optional)	By driver (optional)	By driver (optional)	By driver (optional)
CRI	-	>90	-	>90
Emergency	-	-	-	-
Energy efficiency class	A	A++	A	A++
Note	-	On request available dimmable PUSH or DALI. On request available emergency.	-	On request available dimmable PUSH or DALI. On request available emergency.

OPTIONAL ACCESSORIES

product code	optional code	description	info
6323.AC	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
	BR6323LT	Brick box	Dimensions L: 195 mm; W: 160 mm; D: 160 mm (instructions on page 502)
6328.Z.AC	H8500.E	Constant current electronic driver	Suitable for n°2 code 6328.Z.AC - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 6328.Z.AC - 500 mA
	BR6328LT	Brick box	Dimensions L: 195 mm; W: 160 mm; D: 160 mm (instructions on page 502)
6313.AC	H8105	Dimmable electronic transformer	Max watt 105W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
	BR6313LT	Brick box	Dimensions L: 230 mm; W: 150 mm; D: 160 mm (instructions on page 502)
6318.Z.AC	H8500.E	Constant current electronic driver	Suitable for n°1 code 6318.Z.AC - 500 mA
	BR6318LT	Brick box	Dimensions L: 230 mm; W: 150 mm; D: 160 mm (instructions on page 502)

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²