

Design

Andrea Castrignano



# NASTRO




## SEMI INCASSO.

Un magico effetto sulla parete, un'elegante fascia luminosa che arreda gli ambienti in cui viene installata: Nastro, semi incasso a scomparsa totale in AirCoral®, adatto per installazione in parete o soffitto di cartongesso o laterizio, compone armonie di luce, impreziosendo le superfici con un design unico e ricercato. La presenza del vetro satinato permette alla luce di diffondersi nello spazio delicatamente. Studiata per diventare parte integrante del muro o del controsoffitto, installabile sia in orizzontale che verticale, la sua applicazione crea "movimento" delle forme e dei volumi, per un effetto luminoso dal fascino discreto.

## SEMI RECESSED.

*A magical effect on the wall, an elegant bright band that decorates the environments it is installed in: Nastro, a totally disappearing semi recessed luminaire made of AirCoral® installable on plasterboard or brick walls and ceilings, composes harmonies of light, enhancing architectures with a unique and refined design. The satin glass allows the light to spread in a very delicate way. Designed for becoming an integral part of the wall or of the false ceiling and installable both horizontally or vertically, it creates a "moving" effect of shapes and volumes, reproducing an atmosphere of discreet fascination.*

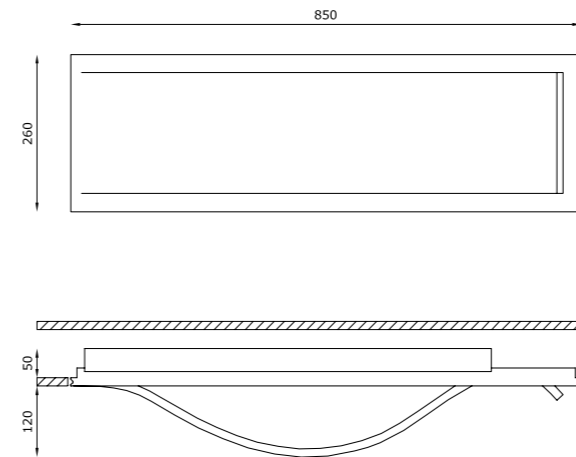

## TECHNICAL FEATURES

Code	2974.AC	2975.P.AC	2979.AC
Type	Wall and ceiling half recessed 	Wall and ceiling half recessed 	Wall and ceiling half recessed 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	38.52 m <sup>2</sup>	38.52 m <sup>2</sup>	38.52 m <sup>2</sup>
Weight	11 Kg	11 Kg	11 Kg
Mounting	Wall and ceiling mounting	Wall and ceiling mounting	Wall and ceiling mounting
IP rating	IP40	IP40	IP40
Insulation class	I	I	I
Control gear	Electronic ballast	Dimmable electronic ballast	Dimmable constant current driver
Cut out for plasterboard	860 x 270 mm	860 x 270 mm	860 x 270 mm
Lamp type	TC-TEL 	TC-TEL 	LED 350mA 
Lamp wattage	2 x 32W	2 x 32W	2 x 6.5W
Luminous efficacy	-	-	2 x 810 lm - 3000K
Light distribution	-	-	Wide beam 120°
Fitting	Gx24q-3	Gx24q-3	-
Light colour	-	-	White 3000K White 2700K   4000K (on request)
Light hole	-	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	>90
Emergency	-	-	-
Energy efficiency class	A	A	A+
Note	Extra white satin glass fixed by screws.  Vertical and horizontal mounting.	Extra white satin glass fixed by screws.  Vertical and horizontal mounting.	Extra white satin glass fixed by screws.  Vertical and horizontal mounting.
		Standard: dimmable switch dim. / push (on request: dimmable 1-10V or DALI).	Trailing-edge and leading-edge dimming (20 - 100%).

\* The absorption capacity per m<sup>2</sup> calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m<sup>2</sup>

