

NOVA




INCASSO A SCOMPARSA DAI BORDI STONDATI.

Un incasso a scomparsa totale da interni in AirCoral® per installazione in soffitto di cartongesso caratterizzato da un foro luce stonato in grado di donare grande plasticità al soffitto. Il fascio luminoso creato da Nova accentua l'effetto di morbidezza delle superfici su cui è installato e degli ambienti.

TOTALLY RECESSED FITTING WITH ROUNDED EDGES.

This indoor recessed lighting system made of AirCoral® has a rounded light hole and a total disappearance effect into plasterboard ceilings able to give great plasticity to the ceiling. The light created by Nova emphasizes the smooth effect given by the surfaces it is installed on.

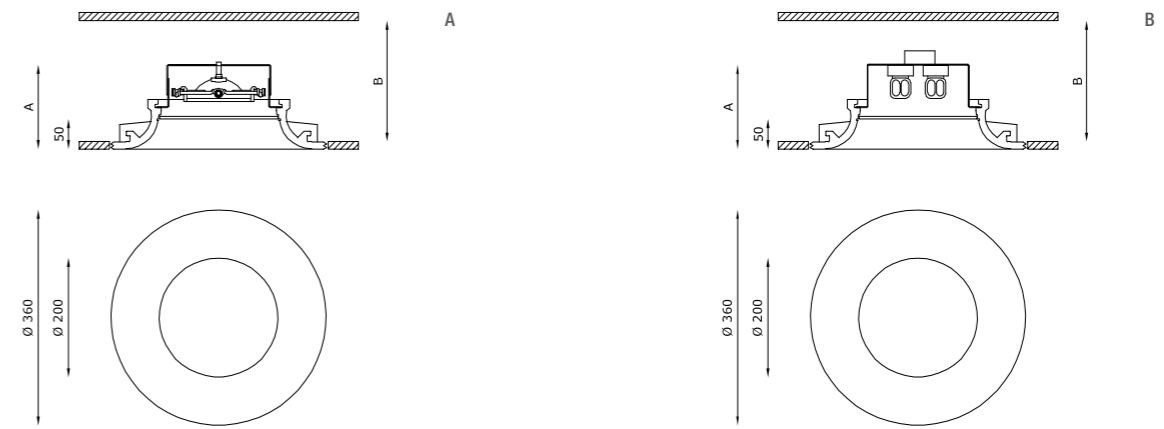

TECHNICAL FEATURES

Code	5271.AC (fig. A)	5276.AC (fig. B)	5285.AC (fig. B)	5291.AC (fig. B)	5293.AC (fig. B)
Type	Tiltable downlight ± 30°	Downlight 90°	Downlight 90°	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	8.92 m²	8.92 m²	8.92 m²	8.92 m²	8.92 m²
Weight	5.5 Kg	5.6 Kg	5.8 Kg	6.8 Kg	5.8 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40	IP40	IP40
Insulation class	III	I	I	I	I
Control gear	Dimmable electronic transformer	Electronic ballast	Electronic ballast	Constant current electronic driver	Dimmable constant current driver
Dimensions	A: 165 mm; B: 250 mm	A: 165 mm; B: 250 mm	A: 180 mm; B: 250 mm	A: 200 mm; B: 220 mm	A: 170 mm; B: 220 mm
Cut out for plasterboard	Ø 370 mm	Ø 370 mm	Ø 370 mm	Ø 370 mm	Ø 370 mm
Lamp type	QR 111	TC-TEL	TC-TEL	LED 1050 mA	LED 350 mA
Lamp wattage	1 x 100W max	2 x 26/32W	2 x 26W	1 x 40W	2 x 6.5W
Luminous efficacy	-	-	-	4680 lm - 3000K	2 x 810 lm - 3000K
Light distribution	-	-	-	Wide beam 40°	Wide beam 120°
Fitting	G53	Gx24q-3	Gx24q-3	-	-
Light colour	-	-	-	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	Ø 200 mm	Ø 200 mm	Ø 200 mm	Ø 200 mm	Ø 200 mm
Voltage connection	220-240V / 12V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	>90	>90
Emergency	-	-	1 hour	-	-
Energy efficiency class	A	A+	A+	A++	A+
Note	Extra white satin glass. Frosted glass recessed 50 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 50 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 50 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 50 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 50 mm into the ceiling. Trailing-edge and leading-edge dimming (20 - 100%).

OPTIONAL ACCESSORIES

product code	optional code	description	info
5271.AC	00010KIT	Kit LED dimmable	Bulb 10W · 12V

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2,7 m in height and therefore expressed in m²



Bar I Mulini - ph- G. Doppiu - Cagliari