


PIPEDO

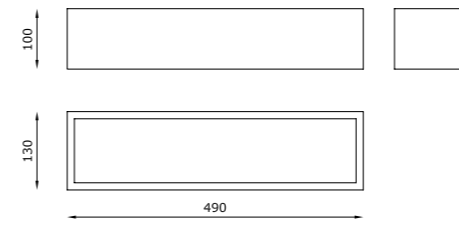

La geometria è il punto di partenza per la realizzazione di un prodotto dal design pulito e minimale: Pipedo è una lampada a parete da interni in AirCoral® che genera una luce indiretta, rivolta verso l'alto con il preciso obiettivo di accendere e portare a nuova vita i dettagli più nascosti. La luce diventa materia con cui plasmare gli ambienti, elemento concreto per una qualità visiva ottimale.

Geometry is the starting point to create a product with a clean and minimal design: Pipedo is an indoor wall lamp made of AirCoral® that emits an indirect light, facing upwards and with a precise goal, to highlight and bring new life to the most hidden details. Light becomes substance to mould spaces with, a concrete element for an optimal visual quality.

TECHNICAL FEATURES

Code	2901.AC	2902.AC	2904.EB.AC	2906.AC	2907.PAC	2908.AC
Type	Wall lamp	Wall lamp	Wall lamp	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	13.31 m²	13.31 m²	13.31 m²	13.31 m²	13.31 m²	13.31 m²
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20	IP20	IP20	IP20
Insulation class	I	I	I	I	I	I
Control gear	-	-	Electronic ballast	Electronic ballast	Dimmable electronic ballast	Dimmable constant current driver
Lamp type	A 60 	QT-DE12 (115 mm) 	TC-L 	TC-L 	TC-L 	LED 350 mA
Lamp wattage	1 x 100W max	1 x 150W max	1 x 36W	1 x 36W	1 x 36W	1 x 8W
Luminous efficacy	-	-	-	-	-	1340 lm - 3000K
Light distribution	-	-	-	-	-	Wide beam 120°
Fitting	E27	R7s	2G11	2G11	2G11	-
Light colour	-	-	-	-	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	-	-	>90
Emergency	-	-	-	1 hour	-	-
Energy efficiency class	A+	A	A	A	A	A+
Note	-	-	-	-	Standard: dimmable switch dim. / push (on request: dimmable 1-10V or DALI).	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2904.EB.AC / 2906.AC 2907.PAC	2900	Glass safety screen	Protection IP40

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²