

# POLARIS




UNA CUPOLA DI LUCE  
MA ANCHE UNA BOTOLA DI ISPEZIONE.

Incasso a scomparsa totale da interni in AirCoral® a luce indiretta per installazione in soffitto di cartongesso, Polaris è dotato di una cupola realizzata in un materiale composito alleggerito, in grado di riflettere la luce emessa dalla sorgente luminosa nascosta e diffonderla in modo indiretto nello spazio. Non è semplicemente un apparecchio illuminante ma anche un prezioso elemento che parla la lingua della funzionalità. La cupola del Polaris, infatti, può essere sollevata e **utilizzata come botola di accesso per l'ispezione** del controsoffitto.

A DOME OF LIGHT  
BUT ALSO AN INSPECTION HATCH.

*Polaris is a totally disappearing direct light recessed indoor luminaire made of AirCoral®, installable on plasterboard ceilings. It has a bright cupola made out of a composite unloaded material capable of reflecting the source light and spread it out indirectly in the room. Not just a light source but also a precious furniture item, that speaks the language of functionality. As a matter of fact, Polaris can be lifted from the support and **be used as trapdoor for the inspection** of the false ceiling.*

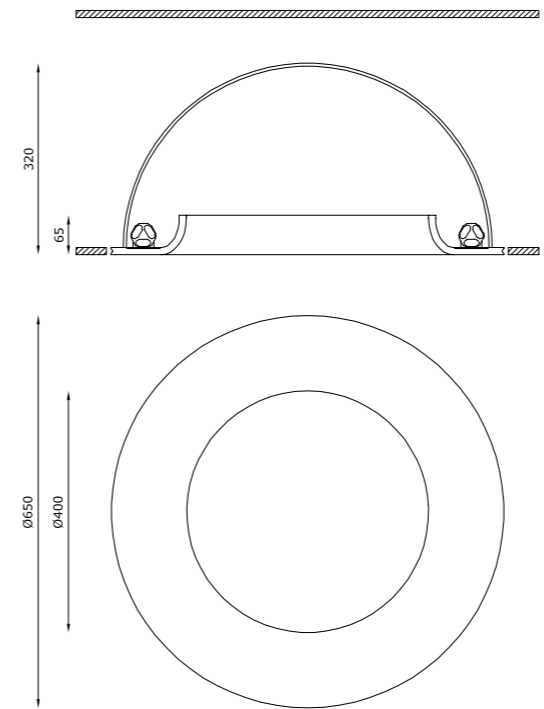

## TECHNICAL FEATURES

Code	6977.AC	6974.AC	6978.AC	6975.P.AC
Type	Downlight 90° 	Downlight 90° 	Downlight 90° 	Downlight 90° 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	21.04 m²	21.04 m²	21.04 m²	21.04 m²
Weight	10.2 Kg	10.6 Kg	10 Kg	10.2 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20	IP20	IP20
Insulation class	I	I	III	I
Control gear	Electronic ballast	Electronic ballast	Constant voltage driver	Dimmable electronic ballast
Cut out for plasterboard	Ø 660 mm	Ø 660 mm	Ø 660 mm	Ø 660 mm
Lamp type	TC-TEL 	TC-TEL 	LED 12V 	TC-TEL 
Lamp wattage	4 x 42W	4 x 26/32W	1 x 24W	4 x 26/32W
Luminous efficacy	-	-	1800 lm	-
Light distribution	-	-	Wide beam 120°	-
Fitting	Gx24q-4	Gx24q-3	-	Gx24q-3
Light colour	-	-	White 3000K	-
Light hole	Ø 400 mm	Ø 400 mm	Ø 400 mm	Ø 400 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V / 12V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	>90	-
Emergency	-	1 hour	-	-
Energy efficiency class	A	A	A+	A
Note	Can be used as a trap door for inspecting the false ceiling. 	Can be used as a trap door for inspecting the false ceiling. 	Can be used as a trap door for inspecting the false ceiling. 	Can be used as a trap door for inspecting the false ceiling. 

Standard: dimmable switch dim. / push (on request: dimmable 1-10V or DALI).

