


SFERA









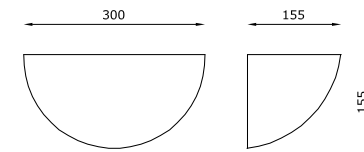

La forma geometrica per eccellenza dà vita a una lampada a parete da interni a luce indiretta in AirCoral® disponibile in 3 differenti misure. Il design delicato e sempre attuale: Sfera mantiene il giusto equilibrio tra funzione e bellezza delle forme, per un prodotto dalle performance illuminotecniche di qualità.

The geometric shape par excellence gives life to an indoor wall lamp made of AirCoral® available in three different versions. With a delicate and always modern design: Sfera keeps the right balance between functionality and beauty of shapes, for a product with high-quality illuminating engineering performances.

A



TECHNICAL FEATURES | SFERA 300


Code	7021.AC (fig. A)	7023.23.AC (fig. A)	7024.EB.AC (fig. A)	7028.AC (fig. A)
Type	Wall lamp 	Wall lamp 	Wall lamp 	Wall lamp 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	7.22 m ²	7.22 m ²	7.22 m ²	7.22 m ²
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP40	IP20	IP40
Insulation class	I	I	I	I
Control gear	-	-	Electronic ballast	Dimmable constant current driver
Lamp type	A 60 	QT-DE12 	TC-TEL 	LED 350 mA 
Lamp wattage	1 x 100W max	1 x 200W max	1 x 26/32W	1 x 6.5W
Luminous efficacy	-	-	-	810 lm - 3000K
Light distribution	-	-	-	Wide beam 120°
Fitting	E27	R7s	Gx24q-3	-
Light colour	-	-	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	>90
Emergency	-	-	-	-
Energy efficiency class	A+	A	A	A+
Note	-	-	-	Satin glass included. Trailing-edge and leading-edge dimming (20 - 100%).

OPTIONAL ACCESSORIES







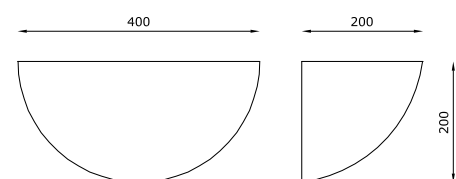



product code	optional code	description	info
7024.EB.AC	7080	Glass safety screen	Protection IP40

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²


B









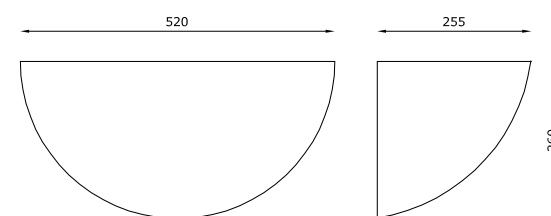

TECHNICAL FEATURES | SFERA 400

Code	7011.AC (fig. B)	7013.AC (fig. B)	7015.AC (fig. B)	7135.AC (fig. B)	7018.AC (fig. B)
Type	Wall lamp 	Wall lamp 	Wall lamp 	Wall lamp 	Wall lamp 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	13 m²	13 m²	13 m²	13 m²	13 m²
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20	IP20	IP40
Insulation class	I	I	I	I	I
Control gear	-	-	Electronic ballast	Electronic ballast	Dimmable constant current driver
Lamp type	A 60 	QT-DE12 	TC-F 	TC-F 	LED 350 mA 
Lamp wattage	100W max	200W max	36W	36W	6.5W
Luminous efficacy	-	-	-	-	810 lm - 3000K
Light distribution	-	-	-	-	Wide beam 120°
Fitting	E27	R7s	2G10	2G10	-
Light colour	-	-	-	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	-	>90
Emergency	-	-	-	1 hour	-
Energy efficiency class	A+	A	A	A	A+
Note	-	-	Satin glass included.	Satin glass included.	Satin glass included. Trailing-edge and leading-edge dimming (20 - 100%).

C



TECHNICAL FEATURES | SFERA 520

Code	7001.AC (fig. C)	7003.AC (fig. C)	7145.AC (fig. C)	7148.AC (fig. C)
Type	Wall lamp 	Wall lamp 	Wall lamp 	Wall lamp 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	22.33 m²	22.33 m²	22.33 m²	22.33 m²
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20	IP20
Insulation class	I	I	I	I
Control gear	-	-	Electronic ballast	Dimmable constant current driver
Lamp type	A 60 	QT-DE12 	TC-F 	LED 350 mA 
Lamp wattage	1 x 100W max	1 x 200W max	1 x 36W	2 x 6.5W
Luminous efficacy	-	-	-	2 x 810 lm - 3000K
Light distribution	-	-	-	Wide beam 120°
Fitting	E27	R7s	2G10	-
Light colour	-	-	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	>90
Emergency	-	-	1 hour	-
Energy efficiency class	A+	A+	A	A+
Note	-	-	-	Satin glass included. Trailing-edge and leading-edge dimming (20 - 100%).

OPTIONAL ACCESSORIES

product code	optional code	description	info
7145.AC	7140	Glass safety screen	Protection IP40

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²