

THE NUDE





TECNOCEMENTO TRASPARENTE.

The nude coniuga La forza e la resistenza del cemento e la trasparenza del vetro temprato. Il risultato è un bollard con luce a 360°, che nasconde nella purezza delle sue forme un prodotto adatto ad installazioni anche tra le più gravose grazie alla sua elevatissima resistenza meccanica, all'abrasione, alla resistenza ai raggi UV, al cloro e al sale. The Nude è costruito con un innovativo cemento trasparente, materiale brevettato ed esclusivo, frutto del reparto di Ricerca e Sviluppo di ItalCementi; già utilizzato con successo presso Padiglione Italia Expo di Shangai.

TRANSPARENT TECHNO-CEMENT.

The Nude combines the strength and resistance of concrete and the transparency of tempered glass. The result is a bollard with 360° light emission, which pure shapes hide a product suitable for even the most onerous installations thanks to its high mechanical, abrasion, UV rays, chlorine and salt resistance. The Nude is built with an innovative transparent cement, exclusive patented material, the result of the Research & Design department of ItalCementi, already successfully used at the Italian Expo Pavilion of Shanghai.

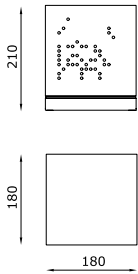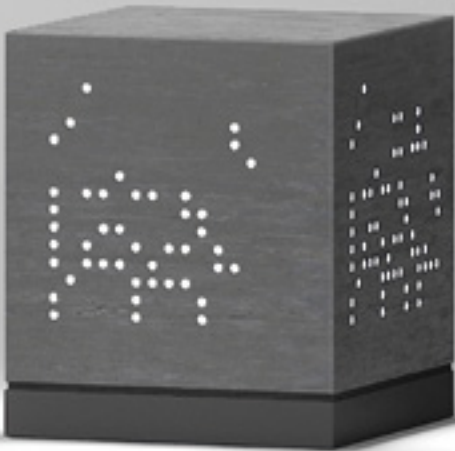

CODE COMPOSITION

1729.DC 4 S 00 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
example of code composition	1729.DC 4 S 00 E 30 WD	

TECHNICAL FEATURES

Code	1729.DC XX
Type	Ground lamp
Material	DC: DurCoral®
Weight	-
Mounting	Ground lamp
IP rating	IP65
Insulation class	III
Control gear	Constant current driver (not included)
Cut out for plasterboard	-
Lamp type	LED 250 mA Vf: 23.5 VDC
Lamp wattage	1 x 6W
Luminous efficacy	900 lm - 3000K
Light distribution	360°
Fitting	-
Light colour	White 3000K White 2700k (on request)
Light hole	194 x Ø 5 mm
Voltage connection	By driver (optional)
CRI	90
Emergency	-
Energy efficiency class	A++
Note	-

OPTIONAL ACCESSORIES

product code	optional code	description	info
1729.DC XX	H8300.A	Constant current electronic driver. Remote installation	Suitable for n°1 code 1729.DC XX - 250 mA

