

UNDERLINE




PIASTRELLA LUMINOSA
IN TECNOCEMENTO DURCORAL®.

Alto indice di protezione da agenti esterni per Underline, apparecchio da terra calpestabile, ideale per installazioni all'aperto, grazie al grado di protezione IP68.
Una luce integrata nella pavimentazione, dal design geometrico realizzata in DurCoral®, l'innovativo brevetto Buzzi & Buzzi che ha resistenza meccanica superiore al calcestruzzo ed è quindi in grado di integrarsi con qualsiasi pavimentazione. Con 5.5W di potenza LED, questo apparecchio non solo è un ottimo segnapasso, ma permette anche di valorizzare gli spazi outdoor.

LUMINOUS TILE
IN DURCORAL® TECHNO-CEMENT.

High protection index from external agents for Underline, the ground walkable luminaire, ideal for outdoor installations, thanks to its IP68 level of protection.
A light built into the paving, with a geometrical design made in DurCoral®, the innovative Buzzi & Buzzi patent with a mechanical strength higher than concrete and can therefore be built into any type of paving. With a LED power of 5.5W, this luminaire is not only an excellent footpath light, but can be also used to enhance outdoor areas.

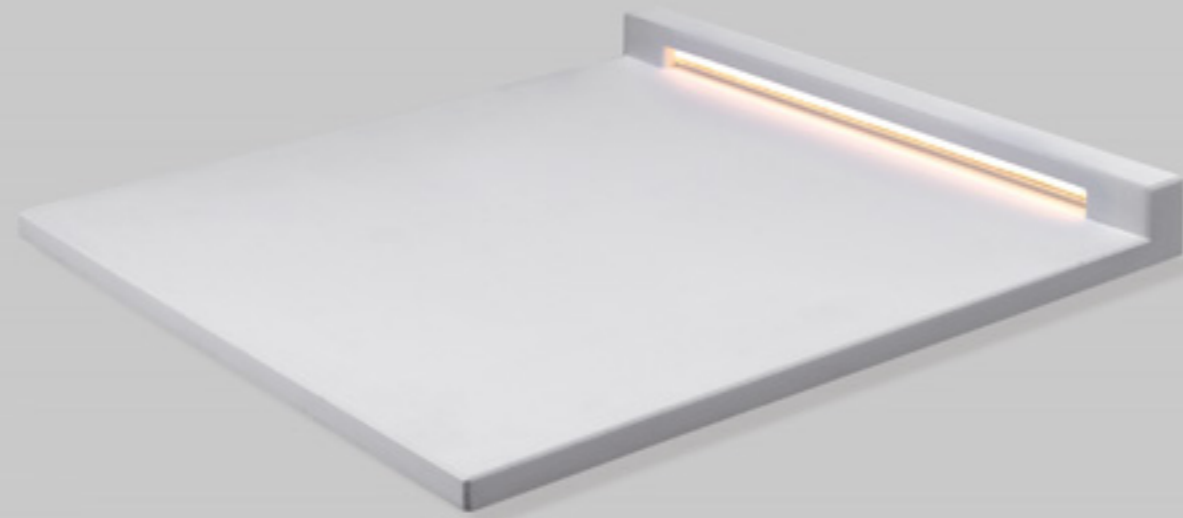


LUCE INTEGRATA NELLA PAVIMENTAZIONE

LIGHT INTEGRATED
IN THE PAVING

può essere appoggiato
direttamente sul terreno (senza
scavi) oppure incollato su un
basamento preesistente

*it can be rested directly on the
ground (without excavations) or
glued onto a pre-existing base*

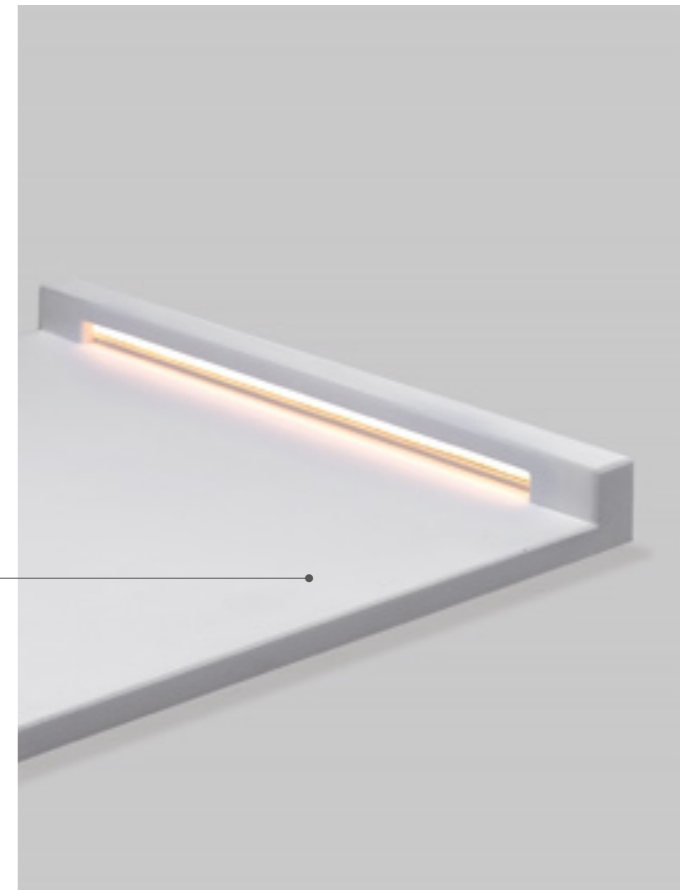

IP68

alto indice di protezione
da agenti esterni


*high protection index
from external agents*

INSTALLATION


installazione sopra il terreno / installation above the ground




installazione a filo terreno / installation level with the ground



Underline è pedonabile
Underline is walkable

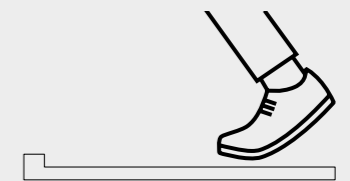

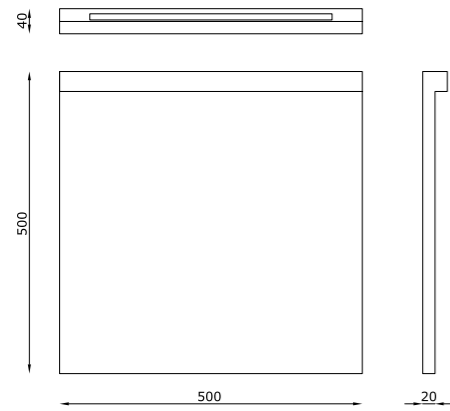

CODE COMPOSITION

1741.DC

TECHNICAL FEATURES

Code	1741.DC
Type	Ground lamp 
Material	DC: DurCoral®
Weight	11 Kg
Mounting	Ground lamp
IP rating	IP68
Insulation class	II
Control gear	Remote constant voltage driver (not included)
Lamp type	LED 24V 
Lamp wattage	1 x 5.5W
Luminous efficacy	40 lm/W - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K
Light hole	400 x 15 mm
Voltage connection	By driver (optional)
CRI	90
Emergency	-
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1741.DC	H8024.D	Constant voltage driver. Remote installation	Suitable for n°3 code 1741.DC - 24V

