
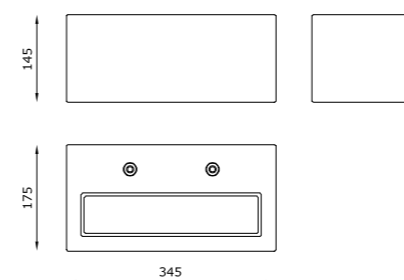


# VIRTUS IP65

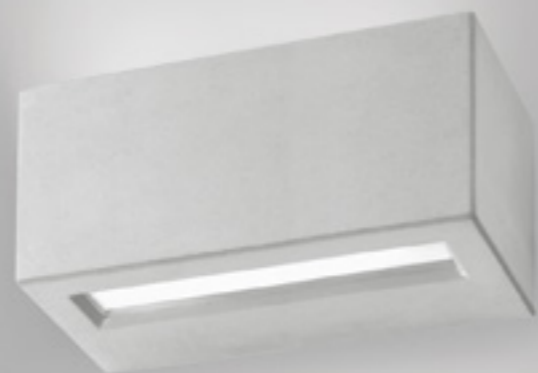

## TECNOCEMENTO DURCORAL® INERTE ALLA SALINITÀ.

Virtus IP65 è un apparecchio per esterni a parete a biemissione realizzato in DurCoral®. Lo contraddistinguono linearità, semplicità ed eleganza: un prodotto che sa impazzire i dettagli architettonici degli edifici, valorizzandone ogni caratteristica e particolare. Un apparecchio che accende gli spazi esterni creando atmosfere delicate e rilassanti, delineate da una forma geometrica lineare e pura.

Una applique a biemissione, che dipinge con la luce sulle pareti, rompendo l'oscurità per abbracciare ed esaltare gli ambienti, in una perfetta sintesi di estetica e tecnologia avanzata. Virtus IP65 ha un'anima interna in alluminio pressofuso, un diffusore in vetro satinato, oltre a guarnizioni in silicone e viti interne in acciaio inox che lo rendono ideale per ambienti esterni.

## DURCORAL® TECHNO-CEMENT, SALT-PROOF.

*Virtus IP65 is a wall lighting device for outdoor use made of DurCoral®. It is characterized by linearity, simplicity and elegance: a product able to beautify architectural details on buildings, enhancing every single particular. A luminaire that lights up external spaces, creating delicate and relaxing atmospheres, outlined by a linear and pure geometrical shape. A bi-emission applique, that paints and plays with light on walls, breaking the darkness to embrace and exalt spaces, in a perfect synthesis of aesthetics and advanced technology. Virtus IP65 has an internal soul in die-cast aluminium, a satin-glass diffuser, silicone gaskets and internal inox-steel screws which make it the ideal product for outdoor environments.*

## TECHNICAL FEATURES

Code	3054.54.DC	3058.58.DC
Type	Wall lamp 	Wall lamp 
Material	DC: DurCoral®	DC: DurCoral®
Weight	8.3 Kg	8.3 Kg
Mounting	Wall mounting	Wall mounting
IP rating	IP65	IP65
Insulation class	I	I
Control gear	Conventional ballast	Constant voltage LED driver
Cut out for plasterboard	-	-
Lamp type	TC-D 	LED 24V 
Lamp wattage	2 x 26W	2 x 13W
Luminous efficacy	-	2 x 1700 lm
Light distribution	-	Wide beam 120°
Fitting	G24d-3	-
Light colour	-	White 3000K White 2700K   4000K (on request)
Light hole	-	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	>80
Emergency	-	-
Energy efficiency class	A	A++
Note	Extra white frosted glass diffuser. Aluminum reflector.	Extra white frosted glass diffuser. Aluminum reflector.