

WHITE BOX




INCASSO ORIENTABILE A 1,2 O 3 PUNTI LUCE E MINIMO INGOMBRO.

Un box prezioso da cui il fascio luminoso si sprigiona determinato: White Box, apparecchio per interni a scomparsa totale in AirCoral® per installazione in soffitto di cartongesso, grazie alla posizione arretrata delle sorgenti luminose, è pensato per avere il minimo impatto visivo all'interno del progetto architettonico, trasformando la luce in pura emozione. Disponibile nella versione singola, doppia e tripla, White Box è il prodotto ideale per valorizzare, attraverso la luce, dettagli, oggetti o situazioni in modo deciso.

ADJUSTABLE RECESSED LIGHT WITH 1, 2 OR 3 LIGHT POINTS AND MINIMUM DIMENSIONS.

A precious box that emits a beam of light in a determined way: White Box, an indoor totally disappearing recessed luminaire made of AirCoral® and installable on plasterboard ceilings, is designed for having a minimal visual impact on the architectural project, transforming light into pure emotion. This is possible thanks to the rearward position of the light sources. Available in three versions — single, double or triple —, White Box is the ideal product to incisively valorize details, objects and settings through light.

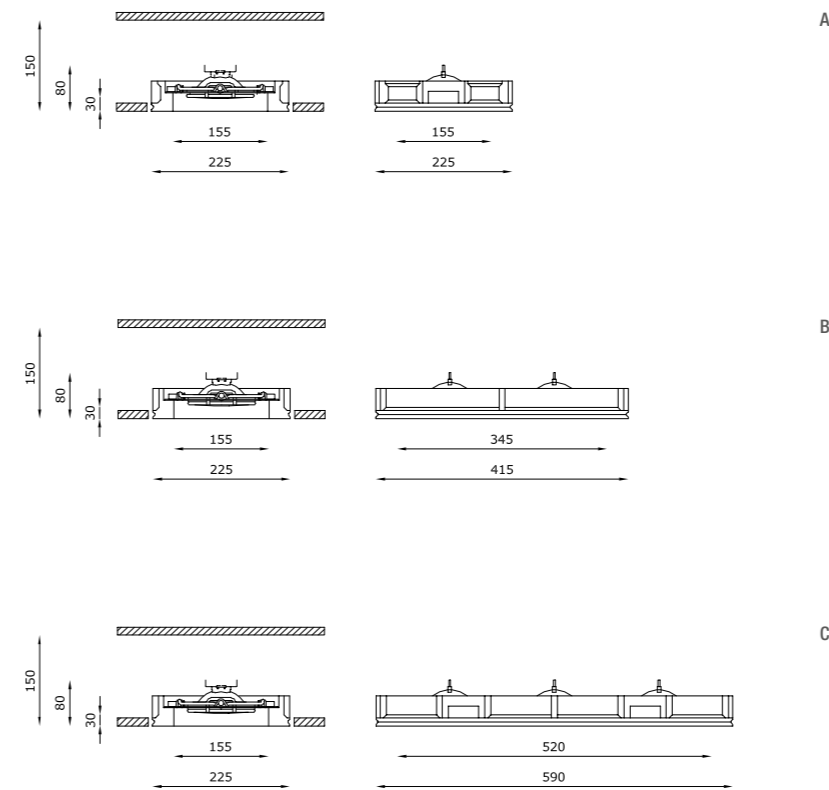

WITHOUT REAR BOX

TECHNICAL FEATURES


Code	6066.AC (fig. A)	6076.AC (fig. B)	6086.AC (fig. C)
Type	Tilttable downlight ± 40° 	Tilttable downlight ± 40° 	Tilttable downlight ± 40°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	4.55 m²	6.75 m²	8.95 m²
Weight	3.2 Kg	4.2 Kg	4.6 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20	IP20
Insulation class	III	III	III
Control gear	Electronic transformer (not included)	Electronic transformer (not included)	Electronic transformer (not included)
Cut out for plasterboard	235 x 235 mm	235 x 425 mm	235 x 600 mm
Lamp type	QR 111 	QR 111 	QR 111
Lamp wattage	1 x 100W max	2 x 100W max	3 x 100W max
Luminous efficacy	-	-	-
Light distribution	-	-	-
Fitting	G53	G53	G53
Light colour	-	-	-
Light hole	155 x 155 mm	155 x 345 mm	155 x 520 mm
Voltage connection	By driver (optional)	By driver (optional)	By driver (optional)
CRI	-	-	-
Emergency	-	-	-
Energy efficiency class	A	A	A
Note	-	-	-

Optional accessories on page 171

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²



Angelo Coppola Showroom - Arch. M. Rosa - Arketipo Design - Monza

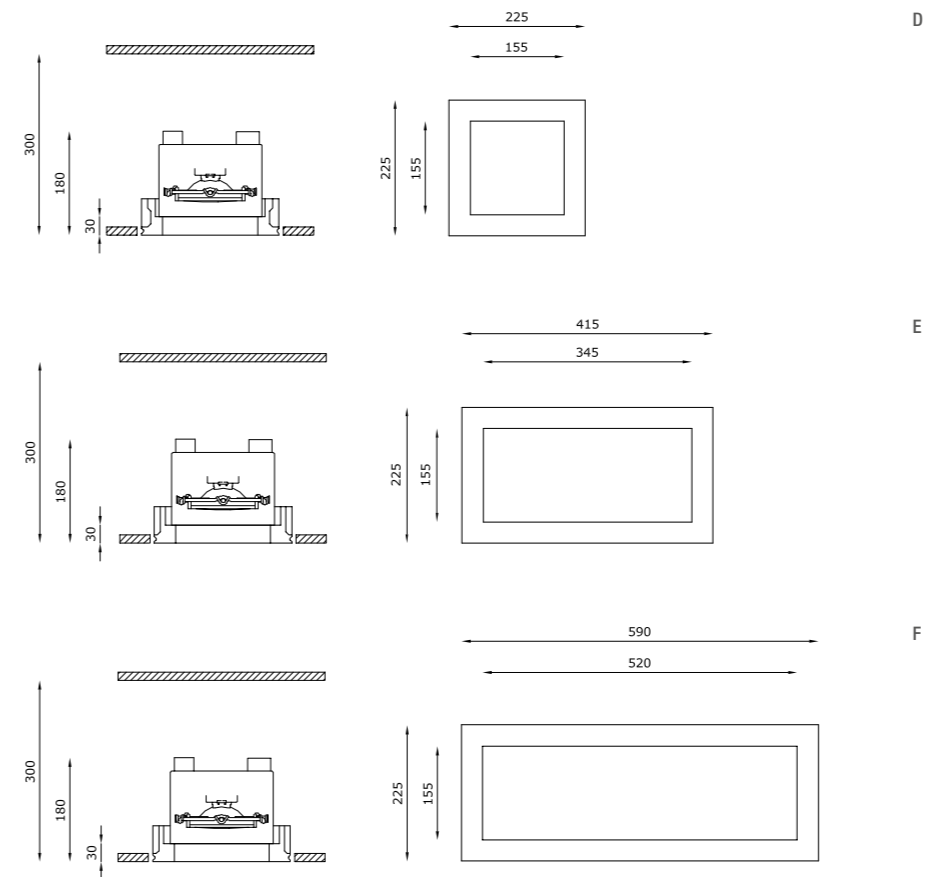

WITH REAR BOX

OPTIONAL ACCESSORIES

product code	optional code	description	info
6066.AC	H8105	Dimmable electronic transformer	Max watt 105W Volts · Hz 230/12V · 50/60Hz
	00010KIT	Kit LED dimmable	Bulb 10W · 12V
	H3535	Rear box	see fig. D
6076.AC	H8105	Dimmable electronic transformer	Max watt 105W Volts · Hz 230/12V · 50/60Hz You need n°2 ballast code H8105 for n°1 code 6076.AC
	00010KIT	Kit LED dimmable	Bulb 10W · 12V
	H3536	Rear box	see fig. E
6086.AC	H8105	Dimmable electronic transformer	Max watt 105W Volts · Hz 230/12V · 50/60Hz
	00010KIT	Kit LED dimmable	Bulb 10W · 12V
	H3537	Rear box	see fig. F