

ZOOM




INCASSO CON VETRO RETROCESSO E FORME SINUOSE.

Luce che valorizza i dettagli, che illumina con delicatezza, per arredare in modo innovativo: Zoom è un incasso da interni a scomparsa totale per installazione in soffitto di cartongesso. Il corpo in AirCoral® è pensato per diventare parte integrante del controsoffitto e sparire completamente alla vista, in modo da dare assoluta importanza al fascio luminoso.

RECESSED FITTING WITH REAR GLASS AND SINUOUS SHAPES.

A light that enhances details, that illuminates gently, to decorate in an innovative way: Zoom is an indoor totally disappearing recessed luminaire, installable on plasterboard ceilings. Its body in AirCoral® is designed to become an integral part of the plasterboard ceiling and to completely disappear from the view in order to give absolute importance to the light beam.

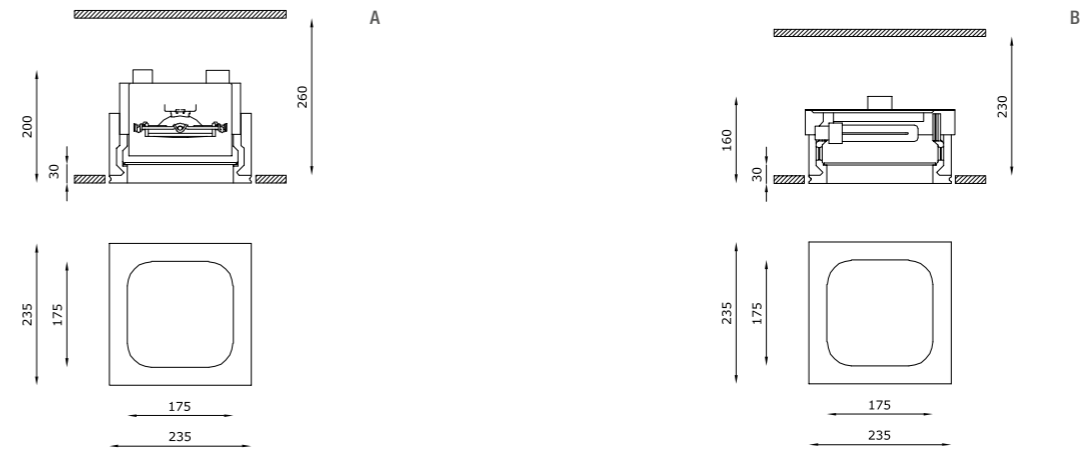

TECHNICAL FEATURES

Code	6171.AC (fig. A)	6176.AC (fig. B)	6185.AC (fig. B)	6181.AC (fig. B)	6183.AC (fig. B)
Type	Tiltable downlight ± 30°	Downlight 90°	Downlight 90°	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	7.72 m²	7.72 m²	7.72 m²	7.72 m²	7.72 m²
Weight	4.4 Kg	4 Kg	4.2 Kg	3.2 Kg	3.2 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40	IP40	IP40
Insulation class	III	I	I	I	I
Control gear	Dimmable electronic transformer	Electronic ballast	Electronic ballast	Constant current electronic driver	Dimmable constant current driver
Cut out for plasterboard	245 x 245 mm	245 x 245 mm	245 x 245 mm	245 x 245 mm	245 x 245 mm
Lamp type	QR 111	TC-TEL	TC-TEL	LED 1050 mA	LED 350 mA
Lamp wattage	1 x 100W max	2 x 26/32W	2 x 26W	1 x 40W	2 x 6.5W
Luminous efficacy	-	-	-	4680 lm - 3000K	2 x 810 lm - 3000K
Light distribution	-	-	-	Wide beam 40°	Wide beam 120°
Fitting	G53	Gx24q-3	Gx24q-3	-	-
Light colour	-	-	-	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	175 x 175 mm	175 x 175 mm	175 x 175 mm	175 x 175 mm	175 x 175 mm
Voltage connection	220-240V / 12V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	>90	>90
Emergency	-	-	1 hour	-	-
Energy efficiency class	A	A	A	A++	A+
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling. Trailing-edge and leading-edge dimming (20 - 100%).

OPTIONAL ACCESSORIES

product code	optional code	description	info
6171.AC	00010KIT	Kit LED dimmable	Bulb 10W · 12V

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2,7 m in height and therefore expressed in m²



Restaurant - Cosenza