


# ELLISSE



La perfezione dell'ellisse si ispira alle geometrie e allo stesso tempo all'arte, concretizzando un prodotto dal design minimalista e moderno: Ellisse è una lampada a parete da interni in AirCoral® in cui la pulizia formale e la purezza della luce si fondono, in una combinazione unica. Una luce indiretta che si diffonde sulle pareti, regalando atmosfere gradevoli e suggestive.

*The perfection of the ellipse is inspired by geometry and art, creating a product with a minimal and modern design: Ellisse is an indoor wall lamp made of AirCoral® that combines purity of shape and of light, in a unique and refined mix. An indirect light that spreads on walls, creating pleasant atmospheres.*

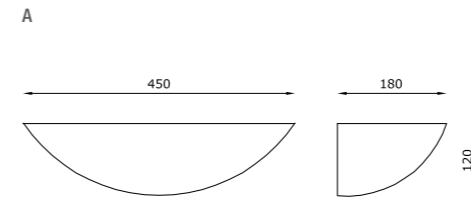

## TECHNICAL FEATURES | ELLISSE 450


Code	7421.AC (fig. A)	7423.23.AC (fig. A)	7424.EB.AC (fig. A)	7428.AC (fig. A)
Type	Wall lamp 	Wall lamp 	Wall lamp 	Wall lamp 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	10.34 m <sup>2</sup>	10.34 m <sup>2</sup>	10.34 m <sup>2</sup>	10.34 m <sup>2</sup>
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP40	IP20	IP40
Insulation class	I	I	I	I
Control gear	-	-	Electronic ballast	Dimmable constant current driver
Lamp type	A 60 	QT-DE12 	TC-TEL 	LED 350 mA 
Lamp wattage	1 x 100W max	1 x 200W max	1 x 26/32W	1 x 6.5W
Luminous efficacy	-	-	-	810 lm - 3000K
Light distribution	-	-	-	Wide beam 120°
Fitting	E27	R7s	Gx24q-3	-
Light colour	-	-	-	White 3000K White 2700K   4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	>90
Emergency	-	-	-	-
Energy efficiency class	A+	A	A	A+
Note	-	-	-	Satin glass included. Trailing-edge and leading-edge dimming (20 - 100%).

## OPTIONAL ACCESSORIES






product code	optional code	description	info
7424.EB.AC	7480	Glass safety screen	Protection IP40

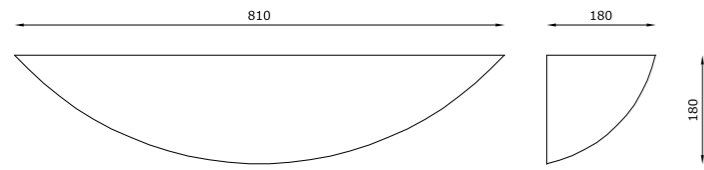\* The absorption capacity per m<sup>2</sup> calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m<sup>2</sup>


B









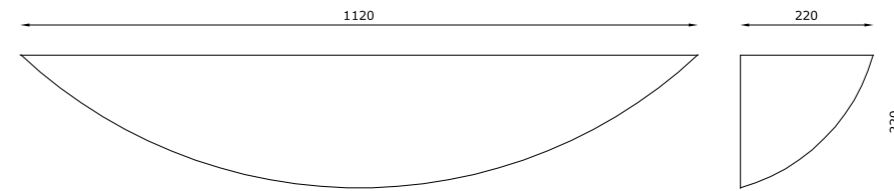

TECHNICAL FEATURES | ELLISSE 810

Code	7411.AC (fig. B)	7413.AC (fig. B)	7415.5.EB.AC (fig. B)	7445.AC (fig. B)	7448.AC (fig. B)
Type	Wall lamp 	Wall lamp 	Wall lamp 	Wall lamp 	Wall lamp 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	22.26 m²	22.26 m²	22.26 m²	22.26 m²	22.26 m²
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20	IP20	IP20
Insulation class	I	I	I	I	I
Control gear	-	-	Electronic ballast	Electronic ballast	Dimmable constant current driver
Lamp type	A 60 	QT-DE12 	TC-F 	TC-F 	LED 350 mA 
Lamp wattage	100W max	200W max	2 x 36W	36W	1 x 12.5W
Luminous efficacy	-	-	-	-	1 x 1620 lm - 3000K
Light distribution	-	-	-	-	Wide beam 120°
Fitting	E27	R7s	2G10	2G10	-
Light colour	-	-	-	-	White 3000K White 2700K   4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	-	>80
Emergency	-	-	-	1 hour	-
Energy efficiency class	A+	A+	A	A	A+
Note	-	-	-	-	Trailing-edge and leading-edge dimming (20 - 100%).

C



TECHNICAL FEATURES | ELLISSE 1120

Code	7403.3.AC (fig. C)	7405.5.AC (fig. C)	7435.AC (fig. C)	7438.AC (fig. C)
Type	Wall lamp 	Wall lamp 	Wall lamp 	Wall lamp 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	38.62 m²	38.62 m²	38.62 m²	38.62 m²
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20	IP20
Insulation class	I	I	I	I
Control gear	-	Electronic ballast	Electronic ballast	Dimmable constant current driver
Lamp type	QT-DE12 	TC-F 	TC-F 	LED 350 mA 
Lamp wattage	2 x 200W max	2 x 36W	2 x 36W	2 x 12.5W
Luminous efficacy	-	-	-	2 x 1620 lm - 3000K
Light distribution	-	-	-	Wide beam 120°
Fitting	R7s	2G10	2G10	-
Light colour	-	-	-	White 3000K White 2700K   4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	>80
Emergency	-	-	1 hour	-
Energy efficiency class	A+	A+	A+	A+
Note	-	-	-	Trailing-edge and leading-edge dimming (20 - 100%).



Private villa - Austria