
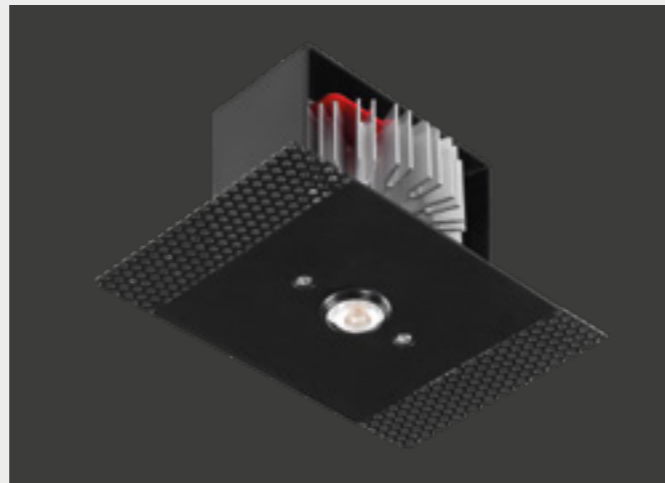



GENIUS NAKED IP65



UN GENIUS NUDO ADATTO PER QUALSIASI SUPPORTO E MATERIALE.

Genius Naked IP65 è un apparecchio a scomparsa totale a soffitto, adatto per esterni e ambienti molto umidi, grazie all'alto grado di protezione IP65. Questo prodotto estende il concetto di totale integrazione superficiale, tipico di Buzzi & Buzzi, a qualsiasi materiale e contesto: infatti può essere installato su qualsiasi superficie: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 12 mm a massimo 20 mm.



Unica parte visibile è il foro di soli 20 mm, mentre la parte elettrica è estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

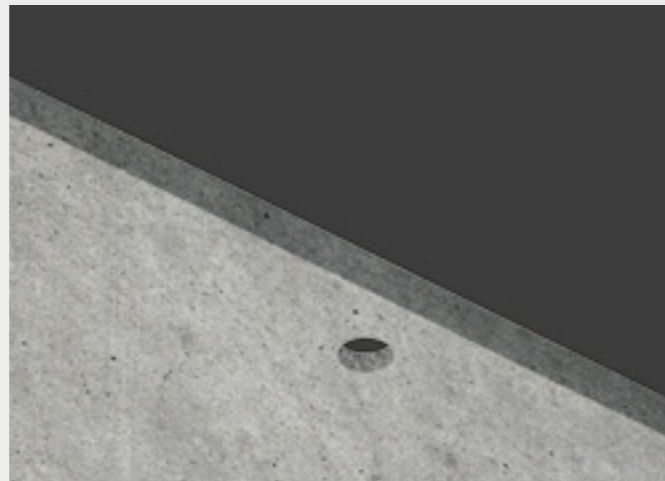

A BARE GENIUS SUITABLE FOR ANY SUPPORT AND MATERIAL.

Genius Naked IP65 is a totally recessed ceiling-mounted luminaire, suitable for use outdoors and in very damp environments, thanks to its high IP65 protection level.

This product extends the concept of total surface integration, typical of Buzzi & Buzzi, to any material and context: in fact, it can also be installed on wood, cement, mirror, marble and industrial modules with a thickness of from 12 mm (0.47") to a maximum of 20 mm (0.79"). The only visible part is the light emission hole measuring only 20 mm (0.79"), while the electrical part can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out, with no need for any inspection hatch, nor for invasive maintenance operations.

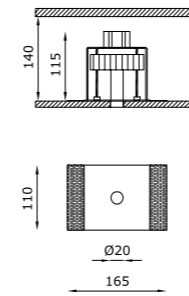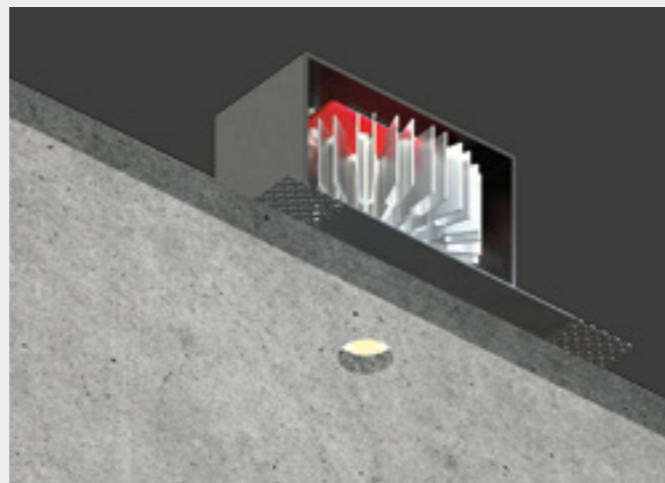

CODE COMPOSITION

2075 BL 4 R 40 E _ND	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
2076 BL 4 R 40 E _ND	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
example of code composition	2075 BL 4 R 40 E 30 WD	

TECHNICAL FEATURES

Code	2075 XX	2076 XX
Type	Downlight 90°	Downlight 90°
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA Vf: 11.5 VDC	LED 700 mA
Lamp wattage	1 x 8.5W	1 x 8.5W
Luminous efficacy	1000 lm - 3000K	1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 20 mm deep.	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 20 mm deep.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2075 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1 or n°3 code 2075 XX - 700 mA