




N-INSIDE

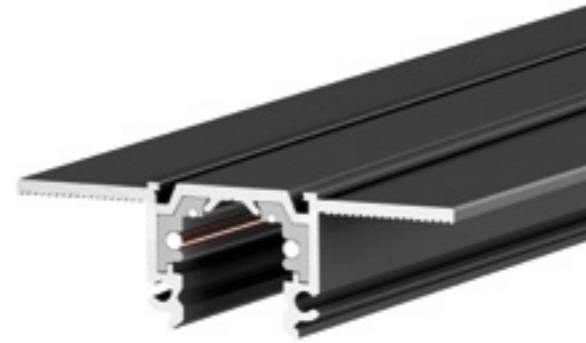

LIGHT MODULES



X1 NANO 48V
78

Z1 NANO 48V
80

Sistema di illuminazione da interno per installazione a incasso. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V. Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio anodizzato nero e dotato di conduttori 48V. N-INSIDE a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata.

A lighting system for interiors for recessed installation. The track and structures can be managed by remote DALI and 1-10V systems. The profile is between 1 m and 3 m long, extruded in anodised black aluminium and fitted with 48V leads. In turn, the 48V N-INSIDE is completed with all the Buzzi & Buzzi lighting products fitted with connections with integrated electronics.

CODE COMPOSITION

T048 T 05 B1 0_1

	length
01	1000 mm
02	2000 mm
03	3000 mm

example of code composition T048 T 05 B1 0 01 1

TECHNICAL FEATURES

Code	T048 T 05 XX
Type	Low voltage track
Material	Aluminum
Finishing	Black
Weight	-
Mounting	Recessed
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	21 mm x A
Voltage connection	48 VDC
Circuits	2 x ±10 A · 48 VDC 1 x ±10 A · 48 VDC + D+/D
Note	The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners.

**TESTATA
DI ALIMENTAZIONE**

POWER HEAD




CODE COMPOSITION

T048 A 00061 B1

TECHNICAL FEATURES

Code	T048 A 00061 B1
Type	Non-polarised power head
Material	Polycarbonate
Finishing	Black RAL 9005 ■
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	-

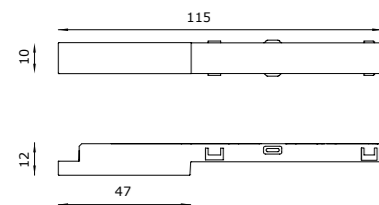

GIUNTO PASSANTE

THROUGH JOINT




CODE COMPOSITION

T048 A 00064 B1

TECHNICAL FEATURES

Code	T048 A 00064 B1
Type	Non-polarised through joint
Material	Polycarbonate
Finishing	Black RAL 9005 ■
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks and to guarantee the supply of current.

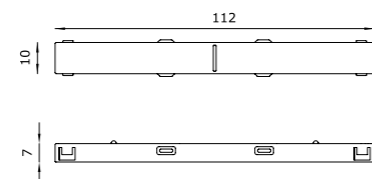

GIUNTO ANGOLARE A 90°

90° CORNER JOINT




CODE COMPOSITION

T048 A 00065 B1

TECHNICAL FEATURES

Code	T048 A 00065 B1
Type	Non-polarised 90° corner joint
Material	Polycarbonate
Finishing	Black RAL 9005 ■
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.

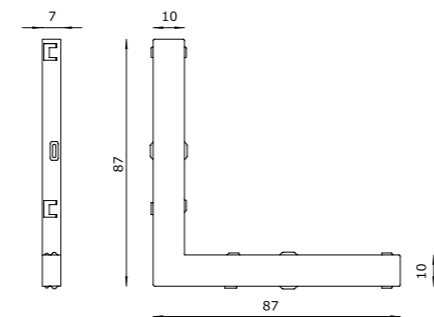

**GIUNTO ANGOLARE A 90°
SOFFITTO-PARETE**

CEILING-WALL
90° CORNER JOINT




CODE COMPOSITION

T048 A 00066 B1

TECHNICAL FEATURES

Code	T048 A 00066 B1
Type	Non-polarised 90° ceiling-wall corner joint
Material	Polycarbonate
Finishing	Black RAL 9005 ■
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Non-polarized angle for ceiling-to-wall connection, used to connect two tracks joined to 90°. Light points cannot be installed in the corners.

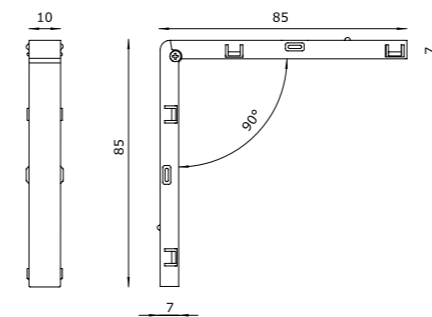

GIUNTO FLESSIBILE

FLEXIBLE JOINT




CODE COMPOSITION

T048 A 00067 B1

TECHNICAL FEATURES

Code	T048 A 00067 B1
Type	Flexible joint
Material	Polycarbonate
Finishing	Black RAL 9005 ■
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.



TAPPO DI CHIUSURA

CLOSURE PLUG




CODE COMPOSITION

T048 A 00063 B1

TECHNICAL FEATURES


Code	T048 A 00063 B1
Type	Closure plug
Material	Polycarbonate
Finishing	Black RAL 9005 ■
Fixing	By screws (included)
Note	-



NEW

TRONCHESE

CUTTER

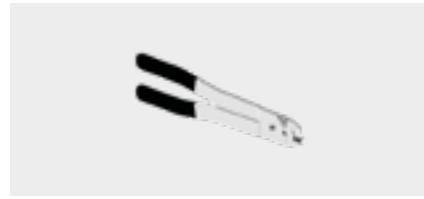


CODE COMPOSITION

TRK 00001 69

TECHNICAL FEATURES

Code	TRK 00001 69
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 1000/2000/3000 mm long nano tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used.

If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



ALIMENTATORE

POWER SUPPLY



CODE COMPOSITION

T048 A 00060 00

TECHNICAL FEATURES

Code	T048 A 00060 00
Type	Constant voltage driver
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	220-240V · 50/60Hz · 48 VDC
Max wattage	240W max
Note	-

