

NEFI




INCASSO CON VETRO RETROCESSO,
MASSIMA INVISIBILITÀ.

Un fascio luminoso che attraversa il buio, determinando un nuovo equilibrio nello spazio abitativo. Luce e ombra si alternano, giocano con gli arredi, fondono e compongono atmosfere dal fascino unico e delicato: Nefi, apparecchio da interni a scomparsa totale in AirCoral® per installazione in soffitto di cartongesso o laterizio, è dotato di un vetro satinato per un'armoniosa diffusione della luce. Design e tecnologia, geometria ed eleganza per inondare gli ambienti di luce viva.

RECESSED FITTING WITH REAR GLASS,
MAXIMUM INVISIBILITY.

A light beam that breaks darkness, establishing a new balance inside the living space. Light and shadows alternate, playing with furniture, creating atmospheres with a unique and delicate charm: Nefi, a totally disappearing indoor recessed luminaire made of AirCoral®, installable on plasterboard or brick ceilings, is equipped with a satined glass, creating an armonious diffusion of light. Design and technology, geometry and elegance to flood the space with bright light.

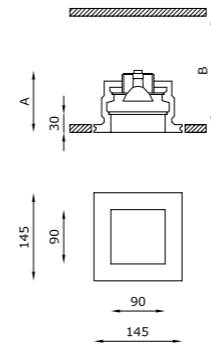

TECHNICAL FEATURES

Code	6218.Z.AC	6219.Z.AC	6261.AC	6262.AC
Type	Downlight 90°	Downlight 90°	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	4.07 m²	4.07 m²	4.07 m²	4.07 m²
Weight	1.6 Kg	2.1 Kg	1.4 Kg	1.5 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40	IP40
Insulation class	III	III	III	I
Control gear	Constant current electronic driver (not included)	Constant current electronic driver	Electronic transformer (not included)	-
Dimensions	A: 140 mm; B: 160 mm	A: 140 mm; B: 160 mm	A: 120 mm; B: 160 mm	A: 120 mm; B: 160 mm
Cut out for plasterboard	155 x 155 mm	155 x 155 mm	155 x 155 mm	155 x 155 mm
Lamp type	LED 500 mA Vf: 18 VDC	LED 500 mA	QR CB 51	QPAR 16
Lamp wattage	1 x 9W	1 x 9W	1 x 50W max	1 x 50W max
Luminous efficacy	1125 lm - 3000K	1125 lm - 3000K	-	-
Light distribution	Wide beam 40°	Wide beam 40°	-	-
Fitting	-	-	GU5.3	GU10
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)	-	-
Light hole	90 x 90 mm	90 x 90 mm	90 x 90 mm	90 x 90 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90	-	-
Emergency	-	1 hour	-	-
Energy efficiency class	A++	A++	A	A
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling. On request available dimmable PUSH or DALI.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.

OPTIONAL ACCESSORIES

product code	optional code	description	info
6218.Z.AC	H8500.E	Constant current electronic driver	Suitable for n°2 code 6218.Z.AC - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 6218.Z.AC - 500 mA
	BR6218LT	Brick box	Dimensions L: 195 mm; W: 160 mm; D: 160 mm (instructions on page 502)
6261.AC	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts - Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W - 12V
	BR6261LT	Brick box	Dimensions L: 195 mm; W: 160 mm; D: 160 mm (instructions on page 502)
6262.AC	0009KIT	Kit LED dimmable	Bulb 6W - 220-240V
	BR6262LT	Brick box	Dimensions L: 195 mm; W: 160 mm; D: 160 mm (instructions on page 502)

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2,7 m in height and therefore expressed in m²



Private villa - ph. T. Pagani - Lugano