

# SPIRIT




## INCASSO WALL WASHER.

Luce che arreda, semplicemente con la forza della purezza e del design: Spirit è un apparecchio da interni a scomparsa totale in AirCoral® per installazione in parete e soffitto di cartongesso o laterizio. È un incasso che cambia la percezione degli spazi, costruendo scenografie suggestive, grazie alle sue forme geometriche precise; gli ambienti prendono vita in modo unico attraverso una luce con effetto wall-washer.

## WALL WASHER RECESSED FITTING.

A light that decorates, simply by force of purity and design: Spirit is an indoor totally disappearing product made of AirCoral®, installable on plasterboard or brick walls and ceilings. It is a recessed luminaire which changes space perception, building suggestive light sceneries thanks to its precise geometric forms; the environment comes to life through a wall-washer light effect.

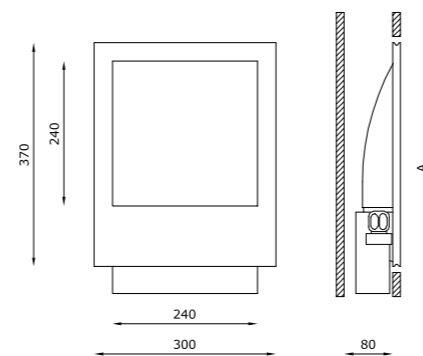

max 60W R7s  
max 26/32W Gx24q-3  
max 42W Gx24q-4  
max 6.5W - 350 mA LED



max 150W R7s  
max 26/32W Gx24q-3  
max 6.5W - 350 mA LED



max 150W R7s  
max 26/32W Gx24q-3  
max 42W Gx24q-4  
max 6.5W - 350 mA LED

## TECHNICAL FEATURES

Code	6252.AC	6264.EB.AC	6258.AC	6259.AC
Type	Wall-washer 	Wall-washer 	Wall-washer 	Wall-washer 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	10.86 m <sup>2</sup>	10.86 m <sup>2</sup>	10.86 m <sup>2</sup>	10.86 m <sup>2</sup>
Weight	3.3 Kg	3.4 Kg	3.9 Kg	3.5 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40	IP40	IP40
Insulation class	I	I	I	I
Control gear	-	Electronic ballast	Electronic ballast	Dimmable constant current driver
Dimensions	A: 370 mm	A: 435 mm	A: 520 mm	A: 370 mm
Cut out for plasterboard	310 x 380 mm	310 x 380 mm	310 x 380 mm	310 x 380 mm
Lamp type	QT-DE12 (75 mm) 	TC-DEL/TEL 	TC-DEL/TEL 	LED 350 mA 
Lamp wattage	1 x 60W	1 x 26/32W	1 x 26/32W	1 x 6.5W
Luminous efficacy	-	-	-	810 lm - 3000K
Light distribution	-	-	-	Wide beam 120°
Fitting	R7s	Gx24q-3	Gx24q-3	-
Light colour	-	-	-	White 3000K White 2700K   4000K (on request)
Light hole	240 x 240 mm	240 x 240 mm	240 x 240 mm	240 x 240 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	>90
Emergency	-	-	1 hour	-
Energy efficiency class	A	A	A	A+
Note	-	-	-	Trailing-edge and leading-edge dimming (20 - 100%).


## OPTIONAL ACCESSORIES

product code	optional code	description	info
6252.AC	BR6252LT	Brick box	Dimensions L: 455 mm; W: 310 mm; D: 160 mm (instructions on page 502)
6264.EB.AC	BR6264EBLT	Brick box	Dimensions L: 455 mm; W: 310 mm; D: 160 mm (instructions on page 502)
6258.AC	BR6258LT	Brick box	Dimensions L: 540 mm; W: 310 mm; D: 160 mm (instructions on page 502)
6259.AC	BR6259LT	Brick box	Dimensions L: 455 mm; W: 310 mm; D: 160 mm (instructions on page 502)

\* The absorption capacity per m<sup>2</sup> calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m<sup>2</sup>



Private House - A. Castrignano - ph. F. Gambina - Milan

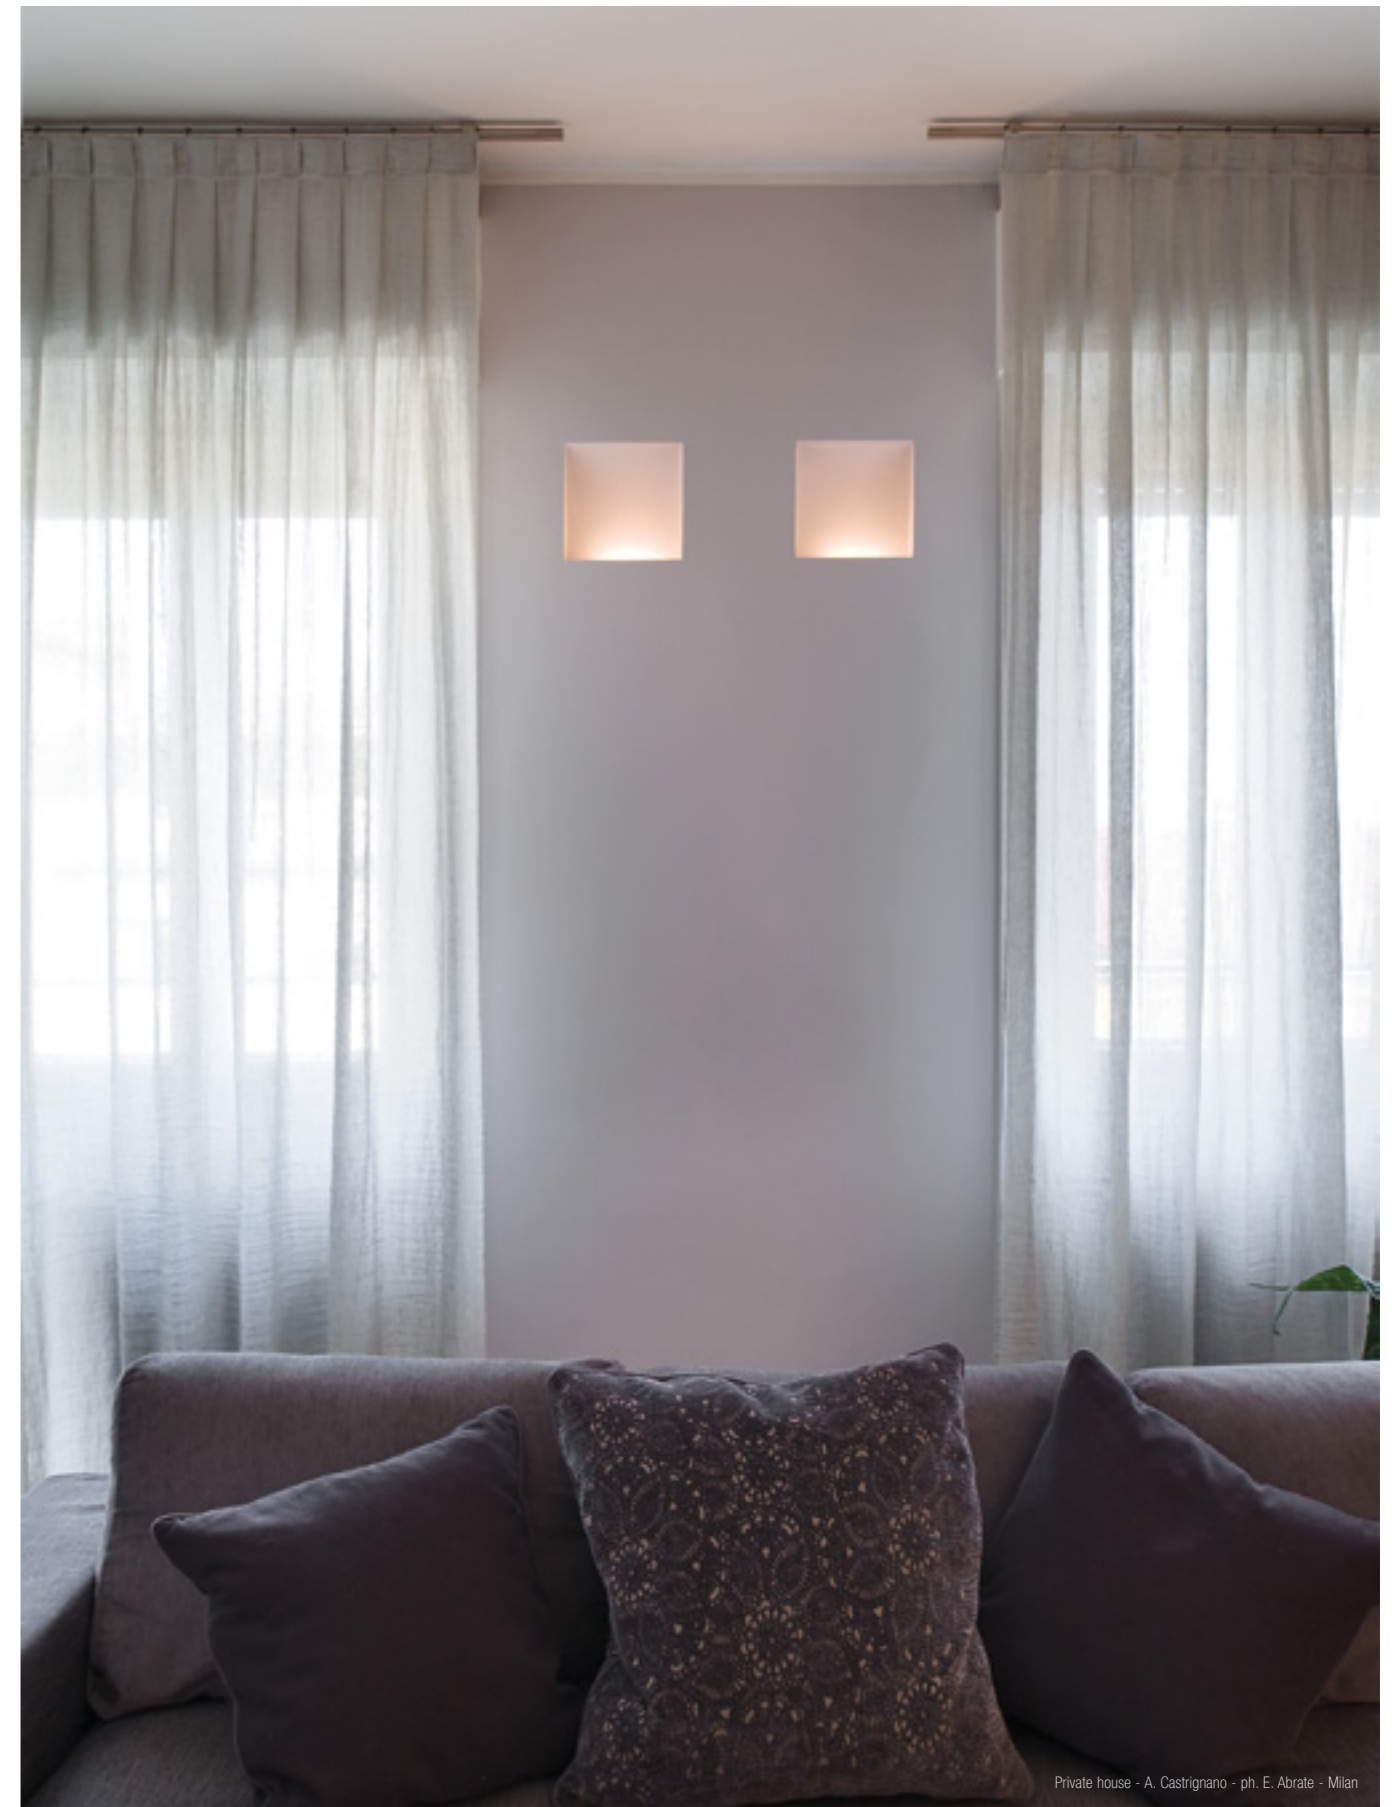

Private house - A. Castrignano - ph. E. Abrate - Milan