



## X1 48V

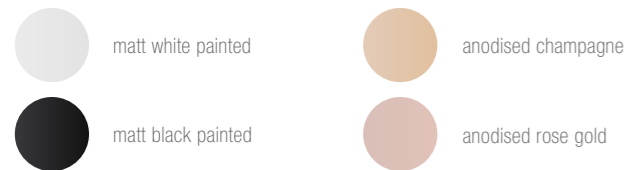

## CODE COMPOSITION

T048 L 00001		0
<i>dimmiability</i>		
<b>ND</b>	non dimmable	
<b>DA</b>	DALI	
<b>11</b>	1-10V	
<i>light colour</i>		
<b>27</b>	2700K	
<b>30</b>	3000K	
<b>40</b>	4000K	
<i>lens</i>		
<b>22</b>	22°	
<b>50</b>	50°	
<i>finishing</i>		
<b>W1</b>	white	
<b>B1</b>	black	
<b>A1</b>	champagne	
<b>A2</b>	rose gold	

example of code composition T048 L 00001 **W1 22 27 ND 0**

## TECHNICAL FEATURES

Code	<b>T048 L 00001 XX</b>
Type	Projector ± 360° / ± 90° 
Material	Aluminum
Finishing	White   Black   Champagne   Rose Gold
Weight	0.4 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED 
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K   4000K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	Black tige for X1 48V anodised champagne and anodised rose gold.

X1 48V è un apparecchio illuminante da interni per binario 48V, disponibile con finitura bianca, nera, anodizzata champagne o rose gold e lenti intercambiabili. Caratterizzato da un proiettore dalle alte prestazioni, dal design minimale per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse verticale di 360° e orizzontale di 90°.

Una luce che valorizza spazi e ambienti con eleganza, rendendo ogni singolo dettaglio il protagonista all'interno dello spazio progettuale. Il proiettore X1 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K (2700K/4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.

*X1 48V is a 48V track light fitting for interiors, available in a black, white, champagne or rose gold anodised finish with interchangeable lenses.*

*Featuring a high-performance projector with a minimal design to have a minimum visual impact, it is fitted with a directional arm 360° adjustable on a vertical axis and 90° on a horizontal one.*

*A light which enhances spaces and environments with elegance, making every detail the protagonist within the project space.*

*The X1 48V projector has an LED (COB) CRI >90, 3000K (2700K/4000K light source on request) fed in direct current with incorporated convertor located inside the track adaptor.*