


X1 NANO 48V

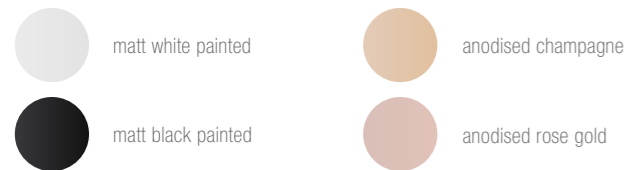


X1 NANO 48V è un apparecchio illuminante da interni per binario 48V N-INSIDE e N10, disponibile con finitura bianca, nera, anodizzata champagne o rose gold e lenti intercambiabili. Caratterizzato da un proiettore dalle alte prestazioni, dal design minimale per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse verticale di 360° e orizzontale di 90°.

Una luce che valorizza spazi e ambienti con eleganza, rendendo ogni singolo dettaglio il protagonista all'interno dello spazio progettuale. Il proiettore X1 NANO 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K (2700K/4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.

X1 NANO 48V is a 48V N-INSIDE and N10 track luminaire, available in black, white, anodised champagne or rose gold finishes and interchangeable lenses. Characterised by a high performance projector, with a minimal design to give minimum visual impact, it is fitted with an adjustable arm which can be tilted over a vertical axis of 360° and a horizontal axis of 90°.

A light which enhances spaces and environments with elegance, making every individual detail the protagonist of the interior of the design space. The X1 NANO 48V projector has a LED (COB) CRI >90, 3000K light source (2700K/4000K on request) fed by direct current with recessed converter installed inside the track's adaptor.



CODE COMPOSITION

T048 L 00017		0
<i>dimmiability</i>		
ND	non dimmable	
DA	DALI	
11	1-10V	
<i>light colour</i>		
27	2700K	
30	3000K	
40	4000K	
<i>lens</i>		
22	22°	
50	50°	
<i>finishing</i>		
W1	white	
B1	black	
A1	champagne	
A2	rose gold	

example of code composition T048 L 00017 **W1 22 27 ND 0**

TECHNICAL FEATURES

Code	T048 L 00017 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Nano track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	Black tige for X1 NANO 48V anodised champagne and anodised rose gold.