


# Y1

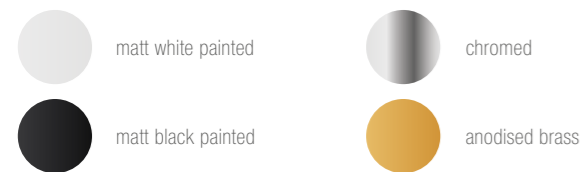

Y1 è un proiettore cilindrico per ambienti interni, adatto per installazioni a soffitto o parete, con dimensioni molto ridotte per un minimo impatto visivo della sorgente.


Ha finitura di serie bianca, nera opaca, brass e cromo e lenti intercambiabili.

Y1 è dotato di un sistema di braccio orientabile a 360°, dagli snodi invisibili. Ha un output luminoso in grado di valorizzare gli ambienti con linearità ed eleganza e, grazie alla sorgente retrocessa, garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo.


*Y1 is a cylindrical projector for indoor environments, suitable for ceiling or wall installations, with small dimensions for minimum visual impact of the light source.*

*It is produced with a white, black or brass and chromed finishings with interchangeable optics.*

*Y1 is fitted with a 360 degrees-adjustable arm system, with invisible joints. Its light output can valorise environments with linearity and elegance and, thanks to the recessed light source it reduces the glaring effect, for maximum visual comfort.*

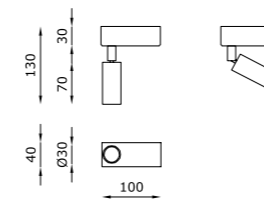

A



B

## CODE COMPOSITION

1111\_4 S \_E\_ ND

*light colour*

<b>27</b>	2700K
<b>30</b>	3000K
<b>40</b>	4000K

*lens*

<b>22</b>	22°
<b>50</b>	50°

*finishing*

<b>WH</b>	white
<b>BL</b>	black
<b>CP</b>	chromed
<b>BR</b>	brass

1112\_4 S \_E\_ WD

*light colour*

<b>27</b>	2700K
<b>30</b>	3000K
<b>40</b>	4000K

*lens*

<b>22</b>	22°
<b>50</b>	50°

*finishing*

<b>WH</b>	white
<b>BL</b>	black
<b>CP</b>	chromed
<b>BR</b>	brass

example of code composition 1111 **WH** 4 S **22** E **30** ND

## TECHNICAL FEATURES

Code	1111 XX (fig. A)	1112 XX (fig. B)
Type	Projector ± 360° / ± 90° 	Projector ± 360° / ± 90° 
Material	Aluminum	Aluminum
Finishing	White   Black Chromed   Brass	White   Black Chromed   Brass
Weight	0.4 Kg	0.4 Kg
Mounting	Wall and ceiling	Wall and ceiling
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant current electronic driver on board (included)	Constant current electronic driver, remote installation (not included)
Lamp type	LED 700 mA 	LED 700 mA Vf: 11.5 VDC
Lamp wattage	1 x 8W	1 x 8W
Luminous efficacy	800 lm - 3000K	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K   4000K (on request)	White 3000K White 2700K   4000K (on request)
Voltage connection	220-240V · 50/60Hz	By driver (optional)
CRI	>90	>90
Emergency	On request	On request
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation.  Black tige and driver box for Y1 chromed and anodised brass.	On request available dimmable PUSH or DALI, remote installation.  Black tige and box for Y1 chromed and anodised brass.

## OPTIONAL ACCESSORIES

product code	optional code	description	info
1112 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1, n°2 or n°3 code 1112 XX - 700 mA



Y1  
Private Villa - Austria