



GENIUS HONEYCOMB

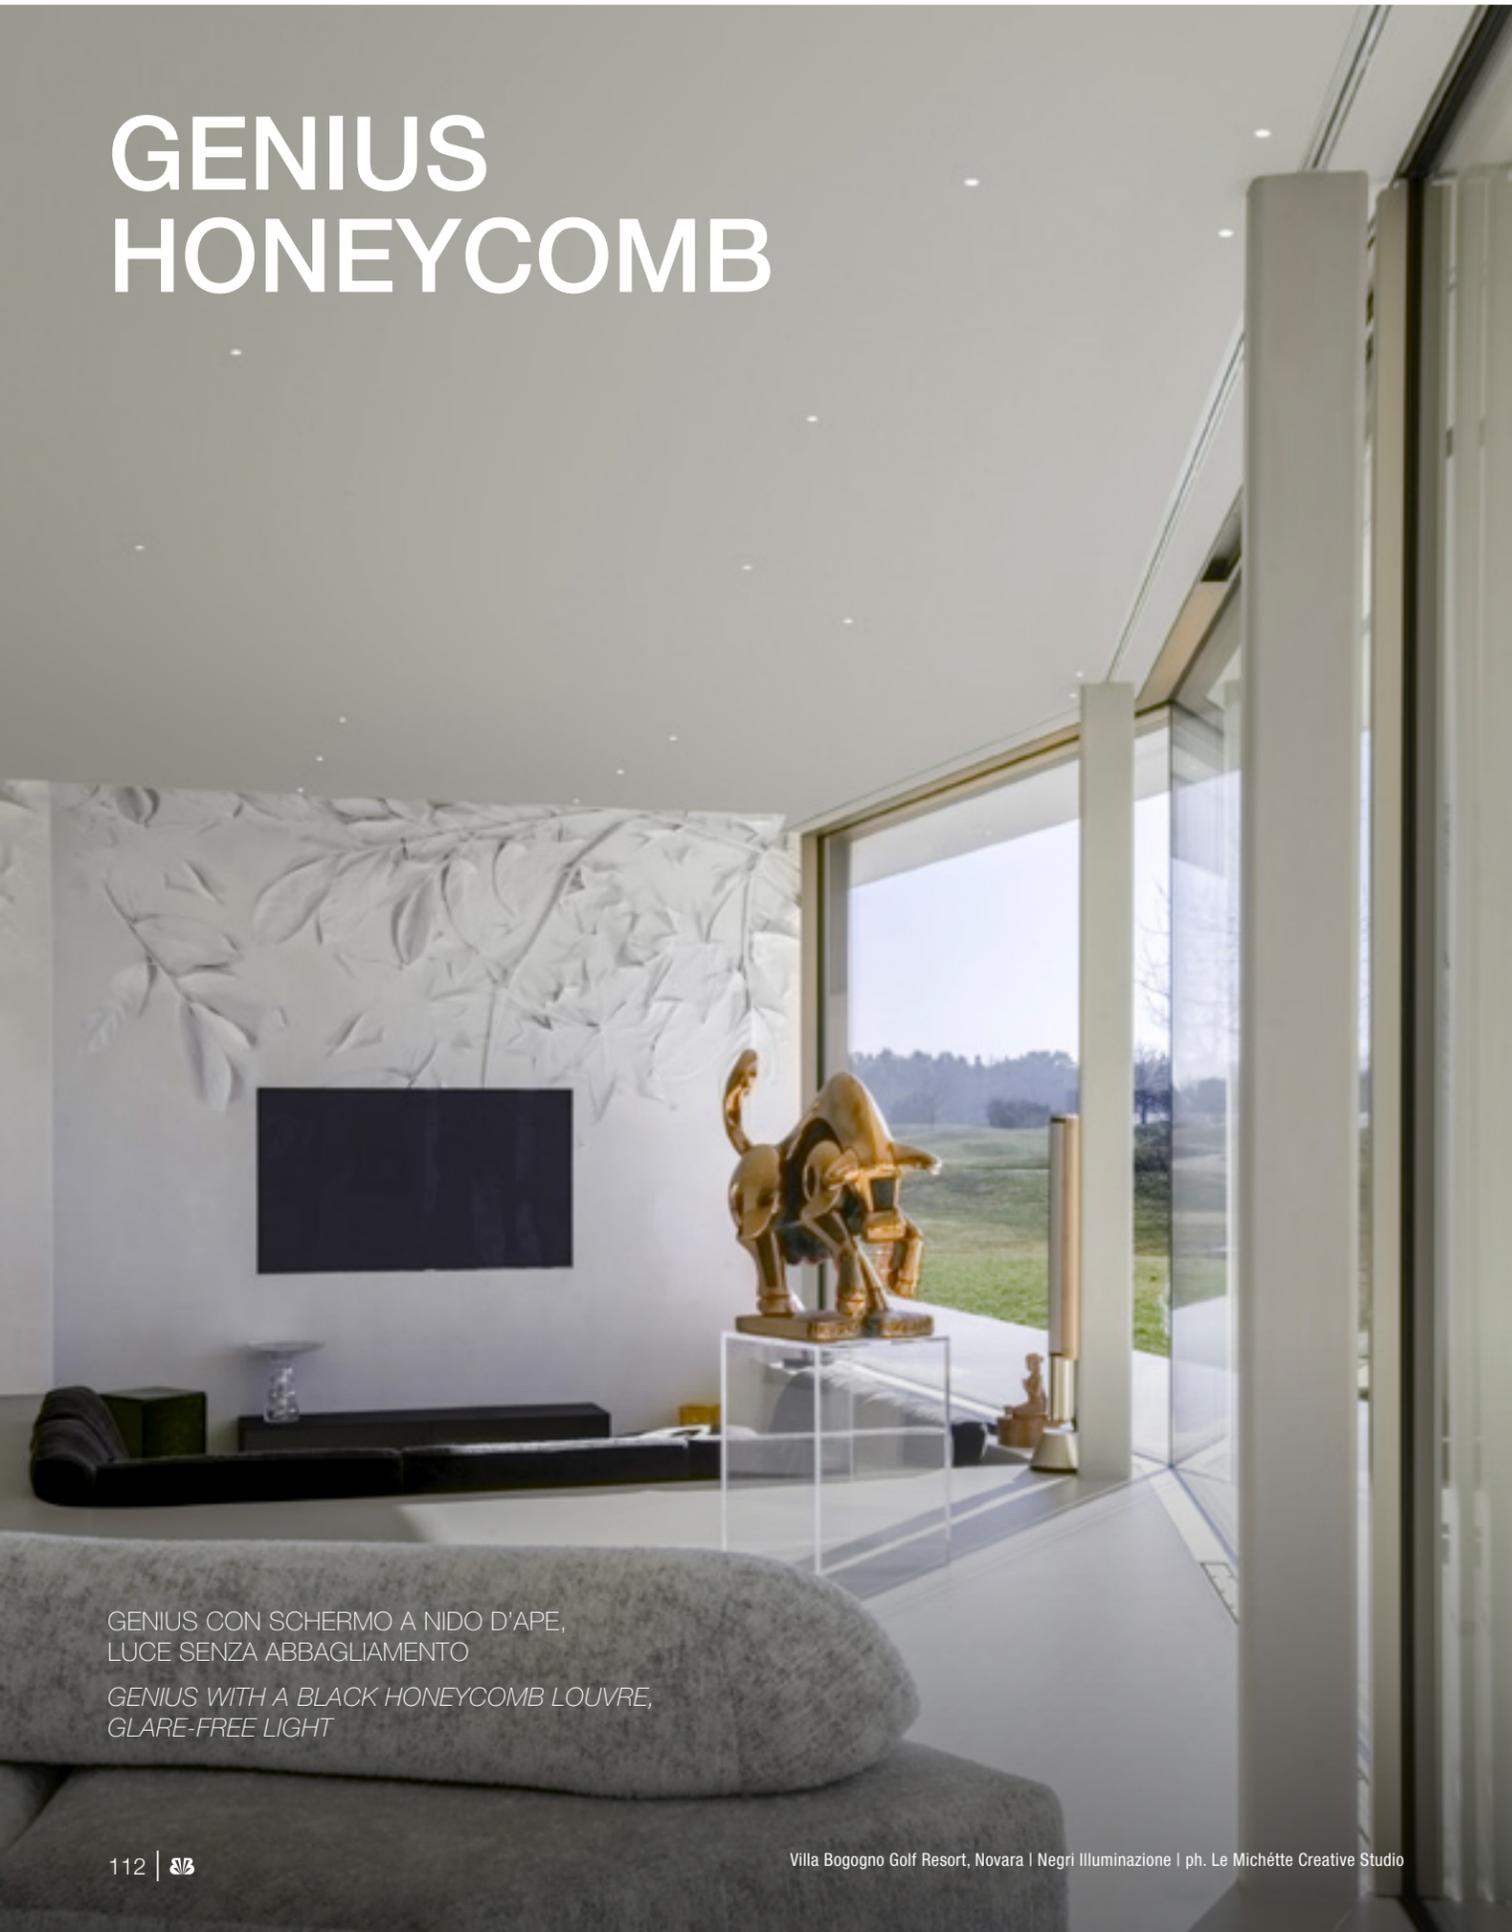


GENIUS CON SCHERMO A NIDO D'APE,
LUCE SENZA ABBAGLIAMENTO

GENIUS WITH A BLACK HONEYCOMB LOUVRE,
GLARE-FREE LIGHT

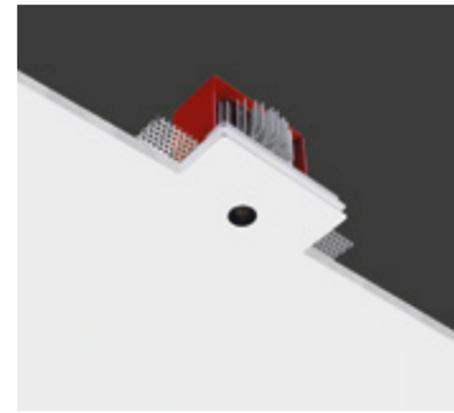

Honeycomb: anti-glare screen for proper light directionally (included).



Genius Honeycomb



OTHER AVAILABLE CODES

1838.AC 4 R _ E _ WD	
<i>light colour</i>	
27	2700K
30	3000K
40	4000K (on request)
<i>lens</i>	
24	24°
40	40°

1839.AC 4 R _ E _ WD	
<i>light colour</i>	
27	2700K
30	3000K
40	4000K (on request)
<i>lens</i>	
24	24°
40	40°

example of code composition 1839.AC 4 R 24 E 30 WD

TECHNICAL FEATURES

Code	1838.AC XX	1839.AC XX emergency
Type	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	1.39 m²	1.39 m²
Weight	0.8 Kg	0.8 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	135 × 110 mm	135 × 110 mm
Lamp type	LED 700 mA ⚡ Vt: 11.5 VDC	LED 700 mA ⚡ Vt: 11.5 VDC
Lamp wattage	1 × 8.5W	1 × 8.5W
Luminous efficacy	1 × 1000 lm - 3000K	1 × 1000 lm - 3000K
Light distribution	Wide beam 24° 40°	Wide beam 24° 40°
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	Ø 24 mm	Ø 24 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	-	-

OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000129	cod. DRV0000129
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1838LT	cod. BR1839LT

For further info and other available drivers please see page 474