



X2

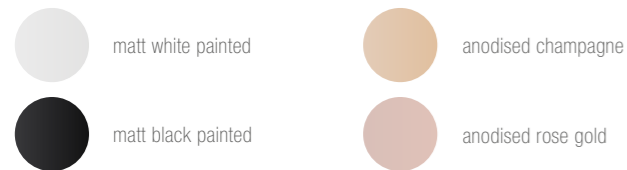

Un doppio proiettore per una luce che si integra perfettamente nello spazio dove viene installato: X2, apparecchio illuminante da interni, disponibile con finitura bianca, nera, anodizzata oro rosa e champagne e lenti intercambiabili, per installazione a soffitto e a parete. X2 è la risposta perfetta per una luce puntuale, definita e performante. I proiettori dalle alte prestazioni e dal design minimale sono studiati per avere il minimo impatto visivo, sono dotati di braccio direzionabile e inclinabile sull'asse orizzontale e verticale di 360°, consentono un vasto potenziale scenografico.

A double projector for a light which perfectly mingles with the space it is installed in: X2, an indoor luminaire installable on ceilings or walls, is available with white, black or anodized rose gold or champagne finishings and interchangeable lens. X2 is a punctual, definite and performing light. The high-performance projectors of minimal design are conceived for having the lowest visual effect and provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically, allowing a wide range of luminescent settings.



A

CODE COMPOSITION

1202_2_S_E_WD

light colour

27	2700K
30	3000K
40	4000K

lens

22	22°
50	50°

finishing

WH	white
BL	black
A1	champagne
A2	rose gold

example of code composition 1202 **WH** 2 S **22** E **30** WD

TECHNICAL FEATURES

Code	1202 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.6 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver, remote installation (not included)
Lamp type	LED 500 mA Vf: 2 x 11 VDC
Lamp wattage	2 x 6W
Luminous efficacy	2 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X2 anodised champagne and anodised rose gold.

OPTIONAL ACCESSORIES


product code	optional code	description	info
1202 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°1 code 1202 XX - 500 mA



X2 (fig. A)
Private Villa - Austria



X2 (fig. B)
SUPERFUTUREDESIGN*

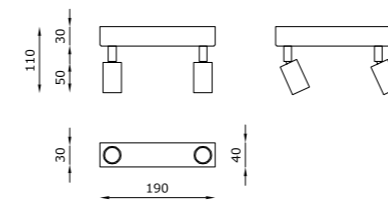

B

CODE COMPOSITION

1201_2_S_E_ND

light colour

27	2700K
30	3000K
40	4000K

lens

22	22°
50	50°

finishing

WH	white
BL	black
A1	champagne
A2	rose gold

example of code composition 1201 WH 2 S 22 E 30 ND

TECHNICAL FEATURES

Code	1201 XX (fig. B)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.6 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	2 x 6W
Luminous efficacy	2 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X2 anodised champagne and anodised rose gold.